Griffith UNIVERSITY
Planning, Design & Construction, Campus Life

Pending Amendments to Clauses in the Griffith University Design Guidelines & Procedures Version 18

Edition 18.1

Note: Additional amendments to Version 18 not included in the previous Pending Amendments Edition are shown in 'green' text

---

Section 1.00 Interpretation and Definitions

1.03 Australian Standards

Amend the first line of the second paragraph as follows;

Where a Standard is called upon by the Building Act, NCC or other relevant legislation.....

1.04 Mandatory requirement

Amend the second paragraph as follows;

Section 8.00 External Walls

8.03 In-situ Finishes

Delete first paragraph and replace with the following;

If untreated exposed concrete is proposed and approved by CLF, the surface finish shall be a

10.10 Toilet Cubicle Partitions

Amend last sentence to read;

..... with privacy strips to doors.

Where timber finishes are used, there must be colour consistency in the timber panel veneers or battens used, particularly where different species are specified or detailed to create patterns or features.

If ceramic tiles are used as a decorative finish, then the requirements of **Clause 12.06** shall apply.

Section 13.00 Floor Finishes

13.01 Colours

Amend second paragraph to read;

Light and plain colours should generally not be used, particularly in high traffic areas or adjacent to external entries.

13.02 Carpet Finishes

Insert new third paragraph as follows;

Further to the constraint in noted Clause 13.01 regarding the use of light and plain colours in floor finishes, this also applies to the use of single colour carpet tiles in floor feature strips or panels. Where such features are proposed utilising bright colour for effect, the feature colour must be uniformly mottled with charcoal or black such that the feature colour does not exceed approx. 50% of the surface area of the carpet tile. Samples of the proposed feature carpet tile must be submitted to the Superintendent for approval.

13.03 Vinyl Finishes

Add the following to the end of the fifth paragraph;

Provide a separate continuous strip of vinyl up to 600mm wide under all urinals to facilitate easy replacement if floor staining becomes excessive. This strip does not need to be a different colour from the rest of the flooring.

Section 14.00 Ceilings

14.01 Generally

Add the following paragraphs;

Where ceilings i.002 Tc 0.182 Tw 3.759 0( )Tn2Tw 3.7urap lfp(p do)-12(es)-8( )1(of)-12( )]TJ 0.002.9 1.614 0 d prsm

The suspension system shall be equivalent to the Armstrong PeakForm PRELUDE 24 XL^2 hot dipped galvanised steel two way exposed suspension system comprising main runners, cross tees and shadowline wall angles. The main runners shall be suspended and accurately levelled on 5mm dia. galvanised steel rod hangers, all in accordance with the manufacturers printed instructions and recommendations. Additional hangers shall be provided at all light fittings and air conditioning registers. Main and cross runners shall not be notched over the wall angle trim at the ceiling perimeter, but attached to the trim using the standard system purpose made clip. The wall angle trim shall be mechanically fixed to the wall framing or structure, not adhesive fixed to the wall lining.

The University requires a 30 year warranty from the manufacturer of the ceiling system against ceiling panel sagging and warping, and rusting of the grid components.

Where ceiling tiles are subject to uplift from wind or air flow from mechanical systems, they shall be secured by use of hold down clips. In these situations, the suspension system shall also incorporate down bracing to prevent movement of the grid.

14.03 *Change clause title to* **Vinyl Faced Fibre Cement Tile Suspended Ceilings**

Delete existing Clause wording and replace with the following;

Ceilings to all toilets, showers, food preparation kitchens (not tea making kitchenettes) and laboratories shall have 1200 x 600 x 6mm thick vinyl faced fibre cement ceiling tiles equivalent to those manufactured by APB Allboards.

If the suspension system is not the same as for the mineral fibre tile ceilings, then it shall be a 'Rondo' or approved equal prefinished exposed steel grid T bar system installed in accordance with the manufacturers written instructions and recommendations.

14.04 Flush Plasterboard Ceilings (ter(gard)-1157Td(ual)-7 0 Td ( )3(h te 0.002 2(o'5(ond)i)3(s)-20(hd)-8(t)oc)5 0.422 0 Td (8(ha)-1
aos-0.001w]TJ 0(y)164916-1(h)-12(e f)-1(o3(C)3(e)6(8 <</MC(i))164916.)-1311(h)-12(e f)-1(o3(C)

Pinboards shall be 'Allboards Visual' or approved equal 6mm Bulletin Board bonded onto MDF board backing, and shall have a full clear 'Fineline' anodised aluminium perimeter trim with mitred corners. The colour of the Bulletin Board shall be agreed with CLF, however all pinboards in corridors and foyers shall be consistent in colour.

Amend fifth paragraph to read;

All boards shall be mounted on concealed fixing brackets. Brackets shall be securely fixed using 'Ramset Hollow Wall' or 'Hilti Cavity' anchors, or screw fixed direct to studs. 'Wall Mate' fixings or plastic plugs in wall linings, are ***not*** permitted. Screw fixing through the perimeter frame or using adhesives to attache boards to walls is ***expressly forbidden.***

Amend schedule of board locations as follows;

Faculty/Admin Offices/Meeting Rooms:	Pinboard, 1200mm long. Whiteboard, 1200mm long. Noteboard 250mm x 300mm high outside room to be installed in conjunction with room sign (see Signage Manual)
Lecture Theatres/Seminar Rooms/ Computer Teaching:	Matte Finish whiteboard with no joints to maximum width of front teaching wall subject to projection requirements at 900mm above f.f.l. Noteboard 250mm x 300mm high outside room to be installed in conjunction with room sign (see Signage Manual)
Laboratories:	Whiteboards and pinboards to size and numbers as stated in the SDFs. Noteboard 250mm x 300mm high outside room to be installed in conjunction with room sign (see Signage Manual)
Common Rooms:	Pinboards to available walls internally (2 No. max.) Noteboard 250mm x 300mm high outside room to be installed in conjunction with room sign (see Signage Manual)
General Offices:	Whiteboards and pinboards internally as stated on the SDFs.
Lift Lobbies:	Pinboard 1200mm long (position to be agreed with CLF)
Learning Centres:	Whiteboard 1200mm long to each group Study Room Pinboard 1200mm long at or near the printers Noteboard 250mm x 300mm high outside room to be installed in conjunction with room sign (see Signage Manual)
Other Occupied Areas:	Noteboard 250mm x 300mm high outside room to be installed in conjunction with room sign (see Signage manual)

15.03 Bookshelves

Remove OFM *from the last paragraph and replace with* CLF.

Add the following new paragraph;

If partition walls to offices and other spaces which require shelving extend from floor level to the

Where the SDF requires a dishwasher to be installed, it shall be a first quality energy efficient and 4 Star WELS rated brand. All dishwashers shall be built-in.

Amend sixth paragraph to read;

Each kitchenette shall be provided with a fridge unit with freezer with an energy rating not less than 5. The size of the unit shall be commensurate with the number of building occupants who will use the facility. Each tea preparation station shall have a bar fridge with an energy rating of not less than 4

All pipework internally within a building shall be.....

Add the following to the end of the first paragraph;

Where fixing brackets or clips to copper pipework are of a dissimilar metal, they shall be effectively isolated from the pipework with plastic tape or similar material to prevent corrosion. Paint finishes are not acceptable as an isolating medium.

Amend the text of first line of the second paragraph as follows;

Internal pipework shall be installed in service ducts, risers.....

Insert new third and fourth paragraphs as follows;

All the return chilled water pipes at the Chiller Plant shall be installed in such a way that allows for complete mixing of all return water before passing the Chiller staging sensor.

Pipework immediately prior to the inlet of any water meter, energy meter or any measuring device installed on the pipework, shall be in a straight length of not less than ten (10) times the pipe diameter.

Amend the text of the last line of the current tenth paragraph as follows;

Automatic air bleeds complete with an isolation valve and drain to nearest waste pipe, shall only be installed at the highest point of the chilled water reticulation system such as the top of vertical risers via a T junction and a short riser extension, and ***not*** on horizontal pipe runs.

Insert new paragraph after existing tenth paragraph;

Chilled water campus reticulation pipework between buildings etc, shall be buried in the ground and shall be 'Blue Brute' or 'HDPE'. Thrust blocks must be installed at all junctions and changes in direction. Where future buildings are planned, provide valved take-offs for future connections located in services pits located adjacent future building sites. Pipework shall be sized to accommodate future building as indicated on the campus Master Plan.

18.01.07 Ductwork & Registers

Amend the text of the second sentence of the second paragraph to read;

Flexible ductwork shall be supported by packaging straps, buckles and mesh saddles not less than 300mm long, to suit the duct diameter.

Insert new third paragraph as follows;

Supply air ductwork immediately prior to the inlet of a VAV boxof12(ox)]TJ 0 0 Tc 0p-8(t)-13(6TJ 0 Tce(ox)]TJ 0

18.

Add the following to the end of the sixth paragraph:

A triple RJ45 data port shall be installed within the DDC section of the MSB in a position determined by the control system installer.

Add a new sentence after the first sentence of the tenth paragraph as follows;
Laboratories and some other special areas shall be exempt.

Amend

- Set Up temperature set point
- Step Down temperature set point
- Step Up load % set point
- Step Down load % set point
- Step Up time controller
- Step down time controller
- Settle time controller
- Chiller sequence

The following control points **shall not** be changeable from the graphics page and shall be dynamic;

- Set Up time
- Step Down time
- Settle time

Chiller Units Graphics Page – Each chiller unit shall have its own graphics page.

If a chiller is in fault or fails to start then a command to start shall be passed to the next chiller in available sequence.

The sequence in which the chillers are operating shall be highlighted on each chiller graphics page.

Chilled Water Reticulation Graphics Page – The sequence in which the chillers are operating shall be highlighted on the page.

The following points shall be able to be forced with an indicator;

- Change lead chiller/pump
- Secondary chilled water pump start/stop
- Pump VSD speed
- Cooling call

If secondary chilled water pumps in a building on the chilled water loop are running, and the building return water temperature is greater than the Step Up temperature set point for more than ten (10) minutes and no chillers are running, then a signal shall be given to start the lead chiller.

Insert the following at the end of the existing second paragraph;

The VSD of any secondary chilled water pump shall be controlled by a pressure transducer located in an easily accessible location at approximately two thirds (2/3) of the distance along the index chilled water pipe run. The pressure transducer pipework shall be configured as shown in the following Diagram 18.ii.

Insert following new paragraph between the existing fourth and fifth paragraphs;

Secondary Chilled Water Pipework Layout – The supply and return pipework within a building, shall incorporate the secondary pipework and control/monitoring valves and equipment as shown on the following Diagram 18.iii

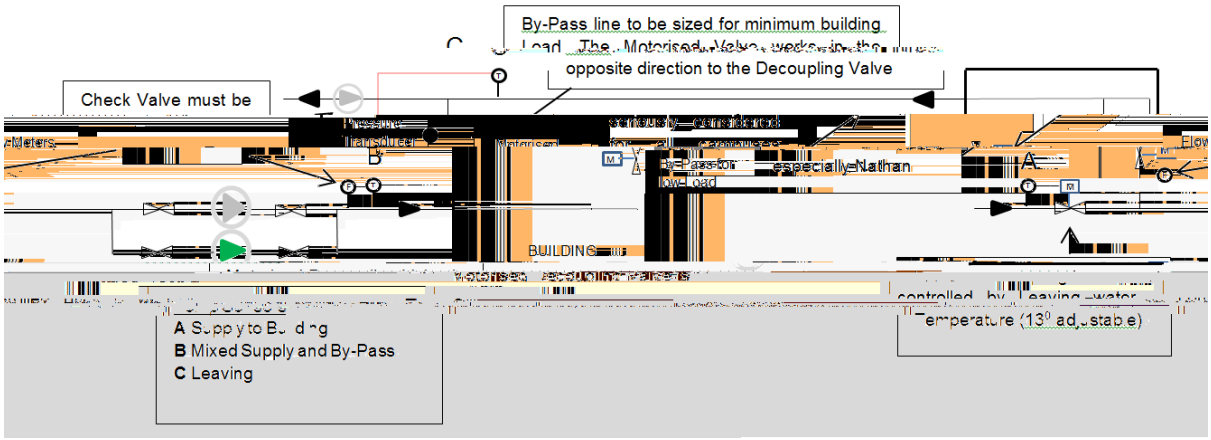

Amend text of existing sixth paragraph as follows;

..... until all fans are running at 50% speed, ...

18.01.26 Graphics Pages

Insert the following new paragraph between the existing first and second paragraphs;

An Alarm page shall be created and be located on the main Campus Directory page index. The alarms, whether in a new building or a refurbishment project, shall include but not be limited the following;

- Loss of compressed air pressure (Building No.)
- Loss of vacuum (Building No.)
- Demineralised water, fault/extra low level (Building No.)
- Sewer pump (Building No. or location)
- Oxygen level (Building No.)
- Power loss/fault - critical buildings (Building No.)

Some alarms will be critical and will need to dial out/SMS, others may not. This is to be determined in consultation with CLF and the space/equipment Users.

Amend existing second paragraph as follows;

- *Delete* mush *and insert* must. *Delete* par *and insert* part

B. For refurbishment projects

Delete text to second dot point and replace with the following;

- For minor refurbishment works, the control may remain on an existing INet system but this will need to be discussed with CLF on a case by case basis, however if this is approved the graphics shall be updated to reflect the latest standard.

Delete existing third dot point.

18.01.27 Energy Management

Insert the following new paragraph at the beginning of the clause;

All air conditioning system designs shall be assessed for the potential to introduce an Economy Mode. The mechanical consultant shall consult with CLF to establish which areas within a building are appropriate for utilising this Mode. Refer to **Subclause 18.01.20** for controls to be provided to operate this system feature.

Delete existing second paragraph and replace with the following;

Staff offices shall be fully air conditioned with individual controls as described in **Subclauses 18.01.18** and **18.01.19**.

Amend the text of the existing fifth paragraph;

..... use of enthalpy control and/or heat transfer systems.....

Amend the text of the existing sixth paragraph;

Electric heaters in..... program. Refer to **Subclause 18.01.09**.

Amend the text of the second sentence in the existing ninth paragraph;

.....switches on for two (2) hours (adjustable) through.....

Delete the abbreviation FCE *in the first line fourth paragraph and replace with* FCU

18.01.29 Design Requirements for VAV Air Conditioning Systems

Delete the abbreviation AGU *from the fourth line of the sixth dot point and replace with* AHU

Delete the last sentence of the sixth dot point and replace with the following;

If electric heaters are fitted to the AHU, then the unit fan shall be

18.04.07 Outlets to Piped Services

Amend text to first sentence of the second paragraph to read;

..... shall be Broen, Enware LF Series or equal as approved by CLF.

18.04.09 CCMS Alarm Points

Amend last line of table as follows;

Water purification plant alarms	High and Low level alarms to tank Common fault from RO plant

18.05.01 Generally

Delete the word unit *between* undertaken *and* the Superintendent *in the last sentence of the second paragraph and replace with* until.

Appendix A – GRIFFITH UNIVERSITY STANDARD POINTS LIST

Add the following to the current Table;

Point Description	Type	DI	DO	AI	AO	Field Device	Comments
CEILING FAN COIL UNITS							
Motion Detector			1			Motion detector	
HEAT PUMP FOR HOT WATER HEATING							
Stop/Start			1				
Supply & return water temp Pump VSD, control & fault			2			MSSB terminal strip	

Section 25.00 Signage

No amendments

26.00 Loose Furniture & Equipment

26.01 Generally

Delete last two paragraphs and replace with the following;

User requirements for furniture types shall be described in the project Space Description Forms.

Furniture purchased shall comply with the specifications contained in the Furniture Catalogue prepared by CLF. This catalogue is located on the Griffith Portal which is accessible only to GU employees, however the relevant specifications will be made available to Consultants and Contractors on written application to the Senior Architect, CLF (t.powell@griffith.edu.au).

Section 27.00 Post Construction Responsibilities of Consultants & Contractors

27.04 Operating & Maintenance Manuals

Delete all content of the existing clause and replace with the following;

Operating and Maintenance (O&M) manuals shall cover all aspects of the work undertaken in the project.

All Manuals shall have a Cover page providing the key project information as required by Standard Drawing GSD-001D.

Each Manual shall have a Contents page properly structured into Sections and indexed with page numbers.

The manuals shall be submitted to the Superintendent in electronic format, and they shall be grouped into a single PDF file for each discipline corresponding to the list provided on Standard Drawing GSD-001C. The PDF file shall be fully searchable and bookmarked according to the section index.

Th6(n6(t)-1[illegible]C2_0 f -39<0078>f 0.458mber Don12ing

Add the following to the table of drawings to be provided;

Discipline

Section 30.00 Certification Under the Building Act at Griffith University

No amendments

Section 31.00 Standard Drawings

No amendments

32.00 Standard Forms

Delete existing Space Description Form template and replace with the following;

1.00 In these conditions, unless the context otherwise indicates and requires, the following terms shall have the meanings respectively assigned to them;

'**Principal**' –

- be sealed
- be endorsed on the front of the envelope with the Tender Name and Closing Date and Time
- not be submitted by facsimile or electronic means

7.00 Unless otherwise stated in the Invitation, **Tenders shall be lodged in the Tender Box at the Office of Planning & Financial Services, Sewell Building (N12), Griffith University, Nathan, 4111** before the time specified for the closing of Tenders. Any Tender not so lodged before the specified closing time shall not be considered unless there is satisfactory evidence that such Tender;

- was delivered to the office of the Principal before the specified closing time; or
- was despatched to the office of the Principal via a third party in sufficient time before the specified closing time to reach that office under normal circumstances but was still in the course of delivery at the specified closing time

8.00 The Principal at its discretion may reject a Tender delivered after the closing time for the receipt of (e)13(d un)13(l)-10eia d uq(i)-1 re
8.003 8.re8.005

The Principal shall not be bound to accept the lowest nor any tender.

No Tender shall be deemed to be accepted until advice in writing of acceptance thereof has been given to the Tenderer by the Principal.

20.00 Unsuccessful Tenderers are entitled to full counselling and debriefing by the Principal.

21.00 No advertisement relating to the acceptance of any Tender shall be published in any advertising medium without the prior approval of the Principal.

FORM OF TENDER

I*/We* the undersigned, do hereby tender to Griffith University to provide all materials and labour and perform all works as Principal Contractor required in and about and in connection with the full and proper construction of;

(Insert Project Number & Name)

..... **P** **c**

(Insert Project Number & Name)
..... **campus**

SUPPLEMENTARY TENDER FORM

The Principal requires the Tender Sum (excluding GST) as stated on the Form of Tender to be broken down by Building/Stage* for Trade Works, plus the amount for On-site Overheads (Preliminaries), for the purposes of funding allocations and for Progress Payment purposes. The Principal intends to award a single Contract to undertake the work uT/Tc 0fun as s

INVITATION TO SUBMIT A TENDER

You are invited to submit a Tender for the execution and completion of the works described below in accordance with the Drawings and Specification (if any) supplied herewith, the Griffith University Conditions of Tender & Conditions of Contract for 'Minor Works' herein, and any other information issued by the Principal for the purposes of tendering.

- Tenders shall close at:

  The Tender Box
  Office of Finance & Business Services
  Level 0, Sewell Building (N12)
  Griffith University, Nathan Qld 4111

- Closing date and time for the receipt of the tender is:

  Date: xxxxxx
  Time: 2.00 pm

- The sealed envelope enclosing the tender shall be marked:

  Tender for:

- The Contract is a Lump Sum Fixed Price not subject to adjustment for rise and fall in costs.
- Tenders shall remain valid for 30 calendar days.
- The tenders will not be opened publicly.
- Date for Practical Completion: within ..... weeks from acceptance or by ...../...../.....
- Liquidated Damages: $..... per day (Clause C13)
- Defects Liability period: ..... months from Practical Completion(Clause C14)
- Times for making payment claims: Monthly
- Retention: 10% of the value of work completed until 5% of the adjusted Contract Sum (including Variations) is held
- Amount of Retention to be held by Principal during Defects Liability period: 2.5% of the adjusted Contract Sum.

C05. Protection of Persons and Property

The Contractor shall take all measures necessary to protect people and property, avoid unnecessary interference with the passage of people and vehicles, prevent nuisance, unreasonable noise and disturbance. If the Contractor damages any property on or adjacent to the site, the Contractor shall provide temporary protection for and shall repair and reinstate the damaged property at its cost.

C06. Care of Works and reinstatement of damage

The Contractor shall be responsible for the care of the whole of the Work under the Contract. If loss or damage occurs to the Work under the Contract, the Contractor shall at the Contractor's cost rectify such loss or damage except loss or damage caused by the negligent act or omission of the Principal, or employees or agents of the principal, or caused by defects in the design of the Work under the Contract.

C07. Indemnity by Contractor

The Contractor indemnifies the Principal against:-
(a) loss of or damage to the Principal's property; and
(b) claims by any person in respect of personal injury or death or loss of or damage to any property;
resulting from or in any way connected with the Contractor carrying out the Work under the Contract, but the Contractor's liability to indemnify the Principal shall be reduced proportionally to the extent that the act or omission of the Principal or employees or agents of the Principal may have contributed to the loss, damage, death or injury.

C08. Insurance of the Works and Public Liability Insurance

Before commencing work under the Contract, the Contractor shall take out insurance sufficient to indemnify the Principal against loss or damage to the Works or to property of the Principal including existing property in or on which the Work under the Contract is being carried out.

The Contractor shall have public liability insurance for an amount not less than $10 million to cover the Contractors liability for loss of or damage to property and death or injury to any person.

The Contractor shall maintain such insurances for the duration of the Contract and provide evidence of such insurances prior to commencing the Work.

C09. Insurance of Employees (WorkCover)

Before commencing work the Contractor shall insure against liability for death of or injury to persons employed by the Contractor. Where the Contractor is a self employed person, The Contractor shall maintain an equivalent insurance policy for itself. The Contractor shall maintain the insurance for the duration of the Contract and shall produce evidence of the insurance prior to commencing work. The Contractor shall ensure that every sub-contractor is similarly insured.

C10. Materials and Workmanship

All materials used in any Work under the Contract and the standards of workmanship shall be in conformity with the provisions of the Contract. In the absence of such provisions in the Contract the material or standard of workmanship as the case may be shall be of a kind which is suitable for its purpose and is consistent with the nature and character of the Works. Unless otherwise specified in the Contract documents, all materials shall be new, and workmanship shall be in accordance with the relevant manufacturer's recommendations or, if none, the relevant Australian Standard where applicable. Apart from any tests specified, the Superintendent may at any time direct that any materials or work shall be examined and/or tested.

The Contractor shall comply with any direction of the Superintendent to remedy any work not in accordance with the Contract within the period of time stipulated in writing by the Superintendent. If the Contractor fails to comply with such a direction to carry out rectification work within the time stipulated, the Principal may have the rectification work the subject of the direction carried out by others at the Contractor's expense or may accept the work at a reduced value. The Principal may deduct the estimated cost of rectification work from payments until such time as the principal has incurred the cost of the rectification

C11. Time for Commencement

The Contractor shall commence work under the Contract within the time stated in the letter of acceptance and shall, unless otherwise permitted, give at least two (2) days' notice to the Superintendent prior to the commencement of work.

C12. Time for Completion

The Contractor shall execute the Works to Practical Completion by the Date for Practical Completion or within any extended time agreed by the Principal. The Contractor shall not be entitled to an extension of time for delays caused by it whether occurring before or after the time for completion nor for delays due to inclement weather or industrial conditions occurring after the Date for Practical Completion. The Superintendent may extend the time for completion for any reason.

C13. Liquidated Damages

If the Contractor fails to complete the Works by the Date for Practical Completion together with any extensions of time granted by the Superintendent, the Contractor shall be liable to the Principal for liquidated damages in the amount stated in the Invitation for every day after that date until Practical Completion has been a tuntilgra2-Tw 0 -1.16 TD3 -1..ica1(al)-1 -40.213 -1.147 a1(n)1(t)2(he)1(I)2eaaD [o TJ 0.012 Tw -403c1utenp ,3(ur)4

GRIFFITH UNIVERSITY

Amending Conditions of Contract

Modifying the Australian Standard

General Conditions of Contract

AS 2124 - 1992

for use on Griffith University projects.

July 2012

CONDITIONS OF CONTRACT

CLAUSE 1 GENERAL

Clause 5.5

Clause 5.6

Clause 5.7

Clause 5.8

Clause 5.9

No amendments to Clauses 5.4 to 5.9 inclusive.

Clause 5.10 Deed of Guarantee, Undertaking and Substitution

ADD the following:

Where the Contractor is a corporation referred to in Clause 5.10 of the General Conditions of Contract the Principal will require a Deed of Guarantee, Undertaking and Substitution in the format required by the Principal.

CLAUSE 6 EVIDENCE OF CONTRACT

DELETE from the first paragraph of Clause 6.2 the following words and punctuation:

rd()1 i()2([EMC 1)1 4nra4(a)1(C)]TJ( )Tj0.3T3 1 Tf 0.004 T

12.3 Contractor to Inform Itself

The Contractor warrants that it has and shall be deemed to have among other things:

(a) examined carefully and to have acquired actual knowledge of the contents of the Drawings, Specifications, Conditions of Tendering, the General Conditions of Contract and the Amending Conditions (if any), and any other information made available in writing by the Principal or any other person on the Principal's behalf to the Contractor for the purpose of submitting its offer for the Works;

(b) examined all information relevant to the risks, contingencies and other circumstances which could affect its offer for the Works and which the Contractor could have obtained by making detailed enquires;

(c) visited and examined the site and its surroundings and informed itself fully as to the physical conditions or obstructions upon and below the surface of the site, and the local conditions, including but not limited to, climatic conditions which may affect the Works;

which differs from that necessary to deal with the physical conditions expressly stated in the contract documents, an adjustment shall be made to the Contract Sum valued in accordance with Clause 40.2.

Differing physical conditions as described by this clause may entitle the Contractor to an extension of time.

12.6 Time Bar

Notwithstanding anything to the contrary in the Contract, if the Contractor fails to provide the notices required by Clause 12.4 within the times specified, the Contractor shall not be entitled to any variation, compensation or extension of time that it might otherwise be entitled to in respect of conditions that differ as described in Clause 12.4.

CLAUSE 13 PATENTS COPYRIGHT AND OTHER INTELLECTUAL PROPERTY

No amendments.

CLAUSE 14 STATUTORY REQUIREMENTS

No amendments to Clause 14.1.

Clause 14.2 Payment where there is No Variation

DELETE Clause 14.2 of the General Conditions of Contract.

Clause 14.3 Notices and Fees

DELETE the third paragraph of Clause 14.3 of the General Conditions of Contract.

ADD New Clause 14.5 as follows:

Clause 14.5 Work Health and Safety Act 2011

For the purpose of this clause the words "Principal Contractor", "serious bodily injury", "work caused illness" and "work injury" have the meanings assigned to them by the Work Health and Safety Act 2011 ("the Act").

Upon acceptance by the Principal of the Contractor's offer:

(i) the Principal shall be deemed to have appointed the Contractor to be the Principal Contractor pursuant to Section 20 of the Act which provides for a person conducting a business or undertaking (PCBU) with management or control of the workplace or workplace fixtures, fittings and plant.

(ii) the Contractor shall be deemed to have accepted the appointment; and

(iii) the Contractor shall, in respect of the Works to be executed under the Contract, be responsible for the performance of the functions and obligations of the Principal Contractor within the meaning of the Act and Regulations in force under the Act.

Such appointment as Principal Contractor under the Act shall be in force during the continuance MC /P <</MCIraphal8.004 Tc c
1La4(w)-3()2(t)247 Td ( )Tri432[(n]TJm)-32d ( )Tj.

CLAUSE 17 DAMAGE TO PERSONS AND PROPERTY OTHER THAN THE WORKS

CLAUSE 18 INSURANCE OF THE WORKS

CLAUSE 19 PUBLIC LIABILITY INSURANCE

CLAUSE 20 INSURANCE OF EMPLOYEES

CLAUSE 21 INSPECTION AND PROVISION OF INSURANCE POLICIES

CLAUSE 22 CLERK OF WORKS AND INSPECTIONS

No amendments in respect of Clauses 15 to 22.

CLAUSE 23 SUPERINTENDENT

Clause 23 is amended as follows:

The Contractor shall procure for himself at his own cost the occupation or use of or relevant rights over any land in addition to the site which he may deem requisite or necessary for the execution of the work under the contract or for the purposes of the contract and shall, as a condition precedent to the issue of the Final Certificate, if so required by the Superintendent, provide a properly executed release from all claims or demands (whether for damages or otherwise howsoever) from the owner or occupier of and from other persons having an interest in such land. Any such release shall be in a form approved by the Principal.

CLAUSE 28 SETTING OUT THE WORKS

No amendments in respect of Clause 28.

CLAUSE 29 MATERIALS, LABOUR AND CONSTRUCTIONAL PLANT

ADD new subclause 29.4 as follows:

29.4 Apprentice/Training Requirements

The Contractor, in the execution of the work under the Contract, must employ on the site of the works either directly or indirectly through subcontractors, apprentices/trainees for a number of labour hours no less than 10% of the total hours of the remainder of the labour employed on site. In this regard -

(i)

thentices/t

CLAUSE 32 WORKING HOURS

ADD to Clause 32:

The working hours shall be between 7:00 am and 6:00 pm and the working days shall be as defined in Clause 2.

DELETE the last paragraph of Clause 32 of the General Conditions of Contract and add:

If the Contractor works or intends to work outside the working hours or working days provided by this Clause, the

The provisions of this clause shall in no way relieve the Contractor's entire responsibility for completion of the work within the contract period.

CLAUSE 34 SUSPENSION OF THE WORKS

No amendment.

CLAUSE 35 TIMES FOR COMMENCEMENT AND PRACTICAL COMPLETION

INSERT after the words "the claim is based," on the fourth line of the third paragraph of Clause 35.5 the following:

.....explanation and supporting evidence of how the critical activities on the program have been affected by the delay and the steps which the Contractor has taken and will take to alleviate and otherwise deal with the delay,

DELETE Sub-clauses 35.5 (b) (ii) and (vi).

REPLACE the full stop at the end of the sixth paragraph of Clause 35.5 with a semicolon and ADD the following:

; delays that do not affect activities on the critical path of the construction programme or revised construction programme under Clause 33 current at the time the cause of the delay arose.

DELETE Clause 35.8.

CLAUSE 36 DELAY OR DISRUPTION COSTS

CLAUSE 37 DEFECTS LIABILITY

ADD to Clause 37:

The Contractor shall allow for the performance of regular preventative maintenance and servicing of the works during the period of the defects liability period. Such maintenance shall be in accordance with the manufacturer's instructions and the requirements of the Workplace Health and Safety Legislation, Australian Standards or other applicable regulations, legislation or advisory standards. With respect to any mechanical or electrical service, fire alarms, hydraulic systems, lifts etc, maintenance shall be carried out not less frequently than monthly. The Contractor shall provide a maintenance service schedule for all equipment for the first 12 months.

A written report shall be provided to the Principal through the Campus Facilities Manager immediately after each monthly service is performed. The report shall detail all work done, defects identified and repaired, and general comments on overall performance.

The Certificate of Final Completion will not be issued until such time as all preventative maintenance requirements have been completed.

CLAUSE 38 CLEANING UP

CLAUSE 39 URGENT PROTECTION

No amendments in respect of Clauses 36, 38 and 39.

CLAUSE 40 VARIATIONS

DELETE the last paragraph of Clause 40.2 and INSERT in lieu the following:

The Contractor shall not be entitled to reimbursement of any additional expense or loss incurred in complying with the requirements of Clause 40.2.

DELETE paragraphs (c), (d), (e) and (f) of subclause 40.5 and INSERT in lieu the following:

(c) to the extent that neither Clause 40.5 (a) or 40.5 (b) apply, reasonable rates or prices shall be used in any valuation made by the Superintendent. Only the actual cost of on site overheads as substantiated by the

Contractor with written evidence shall be taken into account. Off-site overheads and profit shall be applied at the rates stated in Annexure A;

(d) in determining the deduction to be made for work which is taken out of the Contract, the deduction shall include an amount for profit and off-site overheads of 5% of the price of the variation otherwise;

(e) if the valuation is of an increase or decrease in a fee or charge or is a new fee or charge under Clause 14.3, the value shall be the actual increase or decrease or the actual amount of the new fee or charge without regard to off-site overheads or profit;

(f)

may be, shall be liable to pay the difference between the amount of such payment and the amount so properly due and payable.

Payment of monies shall not be evidence of the value of work or an admission of liability or evidence that work has been executed satisfactorily but shall be a payment on account only, except as provided by Clause 42.8.

Except as provided in the Contract and where listed in the Annexure, the Principal shall not be obliged to pay for any item of unfixed plant or materials which is not incorporated into the works.

ADD to the first sentence of the first paragraph of Clause 42.8:

"or give to the Contractor and the Principal in writing the reasons for not issuing the certificate."

DELETE subclause 42.10 and INSERT in lieu the following:

42.10 General Right of Set Off

Without limiting the Principal's rights under any other provision in the contract and notwithstanding the provision of or the issue of a certificate by the Superintendent under Clause 42.1, the Principal may deduct from any monies due to the Contractor any sum which is due and payable by the Contractor to the Principal whether or not the Principal's right to payment arises by way of damages debt restitution or otherwise and whether or not the factual basis giving rise to the Principal's right to payment arises out of this contract, any other contract, or is independent of any contract. If the monies payable to the Contractor are insufficient to discharge the liability of the Contractor to pay such sum to the Principal, the Principal may have recourse to retention monies, and if they are insufficient, to security provided under Clause 5.2 of the contract and if that security is insufficient to any security provided under Clause 5.11 of the contract but in respect thereof only after satisfaction of all Subcontractors Charges. Nothing in this clause shall affect the right of the Principal to recover from the Contractor the whole of such monies or any balance that remains owing.

CLAUSE 43 PAYMENT OF WORKERS AND SUBCONTRACTORS

No amendment in respect of Clause 43.

CLAUSE 44 DEFAULT OR INSOLVENCY

ADD to Clause 44.2:

(h) failing to comply in any respect with the requirements of Clause 5.

DELETE from subclause 44.3 (d) the words and punctuation:

"(which time shall not be less than 6 clear days after the notice is given to the Contractor)"

DELETE Clause 44.10 and INSERT in lieu the following:

44.10 Rights of the Parties on Termination

If the Contract is terminated under Clause 44.4 (b) or Clause 44.9 or under any other provision of the Contract it shall be deemed terminated as from the date when notice of termination in writing is served upon the relevant party.

On such termination of the Contract all or any sums of money which may be in the hands of the Principal or the Contractor in respect of the Contract and are not then payable to the Contractor or the Principal under or pursuant to any provision of the Contract, and the whole or part of any security, including cash lodged or retained for the due and proper performance of the Contract and all or any sums of money named in the Contract as liquidated damages which have accrued due to the Principal or the Contractor may be declared by the Principal or the Contractor to be forfeited and all sums and the whole or part of any security that are so declared to be forfeited shall be forfeited and shall be retained by or become payable to or vested in the Principal or the Contractor as the case may be, only to the extent required to complete the works and/or recover any damages.

On such termination of the Contract all moneys which have been previously paid together with all moneys then payable under or pursuant to any provision of the Contract to the Contractor or the Principal shall be deemed to be in full satisfaction of all claims of the Contractor and of the Principal of any kind or description whatsoever under or in respect of the Contract.

CLAUSE 45 TERMINATION BY FRUSTRATION

Interest on retention moneys and

Limit of Liquidated Damages: (Clause 35.7)	**$**
Bonus per day for early Practical Completion: (Clause 35.8)	**Not Applicable**
Limit of bonus: (Clause 35.8)	**Not Applicable**
Extra costs for Delay or Disruption: (Clause 36)	**Not Applicable**
The Defects Liability Period: (Clause 37)	**Twelve (12) months**
Percentages for off-site overheads or profit: (Clauses 40.5 (c) and (f))	**Off-site overheads 3%** **Profit 4%**
The Charge for overheads, profit, etc. of Daywork: (Clause 41(f))	**In respect of Clauses 41(a), 41(b), 41(c) and 41(e) - 10% and in respect of Clause 41(d) - 5% of the value otherwise**
Times for payment claims: (Clause 42.1)	**At a date to be mutually agreed but not less**