Table of Contents

1 Interpretation and Definitions 12
1.1 Purpose of this document 12
1.2 Use of this document 12
1.3 Abbreviations 12
1.4

16.4.5 Standard Taps 84
16.4.6 Flexible hoses to fixtures and fittings 84
16.4.7 External Hose Cocks 85
16.4.8 Back Flow Prevention 85
16.5 Cold Water Service 85

16.4.8

17.6.3 Compressed Air....113
17.6.4 Vacuum....114
17.6.5 Reverse Osmosis Water....114
17.6.6 Isolation of Piped Services....115
17.6.7 Outlets to Piped Services....115
17.6.8 Identification of Pipework....115
17.6.9 BMS Alarm Points....115
17.7 Commissioning and Handover....115
17.7.1 General Requirements....115
17.7.2 Fume Cupboards....116
17.7.3 Piped Services.... en[(Tm[(Cal6 (om)- D

20.5.13 External Mounting....160
20.5.14 Access to WAPs in Ceiling Spaces....160
20.5.15 Remote or Difficult Placement WAPs....160
20.5.16 Video Conferencing Rooms....160
20.5.17 Learning Centres....160
20.5.18 Space Utilisation & Occupancy Monitoring....161
20.5.19 Mobiles Infrastructure....161
20.6 Equipment and Installation requirements....162
20.6.1 Materials....162
20.6.2 162

20.6.2

1 Interpretation and Definitions

Where a AS is called upon by the NCC or other relevant legislation, the requirements of that AS shall be delivered or exceeded as required by these Guidelines.

1.5 Mandatory requirement

Where a requirement is designated in this document as being **Mandatory**, generally no alternative design, specification, material or manufacturer will be entertained by the University, and the requirement shall be incorporated into the documentation or construction without variation.

Consultants or Contractors may offer alternative innovative solutions to these **Mandatory** requirements for consideration and analysis by CWMP or MPP and the appropriate technical divisions within GU. No such alternative solution may proceed to design or construction without the written approval of the Principal.

1.6 Guideline requirement

If a requirement is not designated as mandatory, GU will consider alternative designs, specifications, materials or manufacturers, provided that the alternatives satisfy the minimum standards for that requirement as outlined in this document.

1.7 Departures from the requirements of this document

Departures from these Design Guidelines & Procedures, or any applicable AS, if allowed, must advised to the University by the relevant design consultant or contractor and be confirmed in writing by the Principal. Any

2 Plannb0pO6ges 1.1 D 1.1e(a)-5si3.6 (Con).6 (t)2.8 (r2.8o (l)-3s(2)]TJ0 Tc 0 Tw3.2267 0 Td( )

At the time of writing, the bushfire risk at Logan, Gold Coast and Nathan is being reviewed in detail. Design teams shall request a project specific brief from the nominated Project Manager.

2.9 Design for People with Disabilities

Buildings and external walkways shall be designed to provide access and use by people with disabilities in accordance with the requirements of the current suite of AS 1428, Disability (Access to Premises – Buildings) Standards 2010, and the NCC.

For all new buildings and major campus works involving modifications to pedestrian travel and access through the campus, the services of a DDA Consultant shall be utilised to review and comment on the design solution for compliance with the foregoing Standards and Codes. GU may elect to appoint this consultant direct or may instruct a design consultant to include this service as part their consultancy or instruct a Contractor to include a DDA consultant in their design team.

Each new building shall incorporate at least one unisex toilet for people with disabilities (PWD) on each level. For major refurbishment projects comprising whole floors, consideration shall be given to this requirement subject to available space and access to services. Subject to confirmation from the Principal, the door to the PWD toilet located on the main building entry level shall be fitted with an electrically operated DORMA ED100 Swing Door Operator system with push buttons, indicator lights and electromagnetic locking. This toilet shall also be fitted with a 'Tiltlock Safe-Assist' 850mm automatic locking folding grab rail adjacent to the pan. Note: A PWD toilet fitted with a door operating system is not to include a shower or baby change table as described in **Clause 2.23**.

The provision of Changing Places for people with profound disabilities will be determined on a project by project basis by the Associate Director Minor Projects following consultation with the relevant elements within GU. The Information Kit prepared by the Association for Children with a Disability (ACD) provides acceptable comprehensive design options for these facilities (www.changingplaces.org.au).

The provision of car parking for people with disabilities is assessed on a campus wide basis taking into account the location of car parking areas and access roadways. The GU Manager Parking, Traffic and Logistics shall be consulted on the most suitable location for disabled car parks with compliant access for each building to meet the relevant Standards.

Requirements for Braille and tactile signage are nominated in **Sections 24, Signage** and the current edition of the GU Signage Manual.

Lifts within and external to buildings shall conform to the requirements of the AS1428 suite of Standards.

2.10 Building Height

Building heights shall reflect the requirements of the Master Plan for the particular Campus, and the specific requirements/constraints of the proposed facility and its designated site.

2.11 Wind around Buildings

The design of an individual building or a group of buildings, shall consider potential problems of wind turbulence creating unpleasant conditions in adjacent public spaces and at building entries, and develop design solutions to eliminate or mitigate these conditions to be presented in a written report to GU.

2.18 Valve Room

Provision for isolation of all incoming services into the building is essential. The isolating valves/provisions shall be readily accessible without ladders or other access equipment. This valve room may be incorporated into a service duct or services plant room and is ideally situated at ground level close to the building perimeter to minimise runs within the building prior to the isolation valves. Meters, irrigation controls and RPZDs may also be located within this room.

2.19 Electrical Riser Cupboa3 (eeR7g794 reW nq/G&6 (i)-0ye)-0.6 (sR)-2.9 (3 ( )Tct)-18ts13.3 (i (ca)-12.3 (l)-1.1 (F

Rather than provide an EoT facility in each building, GU has adopted the principle of providing a facility which will service a number of buildings in close proximity. This shared facility may be 'stand-alone' or be incorporated into a building. A number of these shared facilities currently exist on GU campuses, and the

Usable floor Area (UFA) – is the sum of the floor areas measured at floor level from the general inside face of the walls of all spaces related to the primary function of the building. This will normally be computed by calculating the FECA and deducting common use areas, service areas and non-habitable areas.

If an area which may be deemed as 'common use' or 'service area' e.g. entry foyer, tea room, or store room, is included in the briefed Schedule of Areas, then those areas shall be included in the calculation of UFA. Foyers to large Lecture Theatres should be treated as UFA.

In some cases, the UFA may include some external covered areas which relate to the primary function of the building but are not part of the FECA e.g. covered play area for a Child Care Centre, open roofed civil engineering hydraulics-modelling laboratory.

'Common use area' includes corridors which are defined by partitions, but do not include passages and secondary circulation areas associated with 'open plan' spaces.

'Non-

These types of noise can be quantified as:

- Steady: Equivalent continuous measurement: LAeq
- Transient: Noise level exceeded for 1% of the time: LA01
- Criteria apply over any one (1) hour period during applicable hours (for University activities: 8am to 10pm).

Limits of acceptable noise intrusion are listed the table 2.1 below.

Table 2.1

Room Type	L_{Aeq}	L_{A01}
Faculty Offices and all other individual offices	37dBA	45dBA
Administrative/clerical office (open space), post graduate student areas	37dBA	50dBA
Counselling Office	37dBA	45dBA
Teaching Room	37dBA	45dBA
Lecture Theatre	32dBA	40dBA

Video-conferencing Room	0.3 to 0.7 sec
Corridors & Lobbies	0.6 to 0.8 sec

Other considerations include:

- Rear wall echoes in lecture theatres

A written report outlining the measures taken in the design to address the foregoing shall be submitted to the nominated Griffith Project Manager for review prior to the issue of any tender documents or TPS submission by the lead design consultant or Contractor.

3 Designing for Sustainability

3.1 General

Griffith University has been committed to sustainable development through many of its practices and policies, both written and un-written for many years.

Sustainable development has been defined as 'development that meets the needs of the present without compromising the ability of future generations to meet their own needs'. (from 'Our Common Future', Report to the World Commission on Environment & Development – 1987)

The range of application of a well-developed sustainability policy is shown in the following diagram.

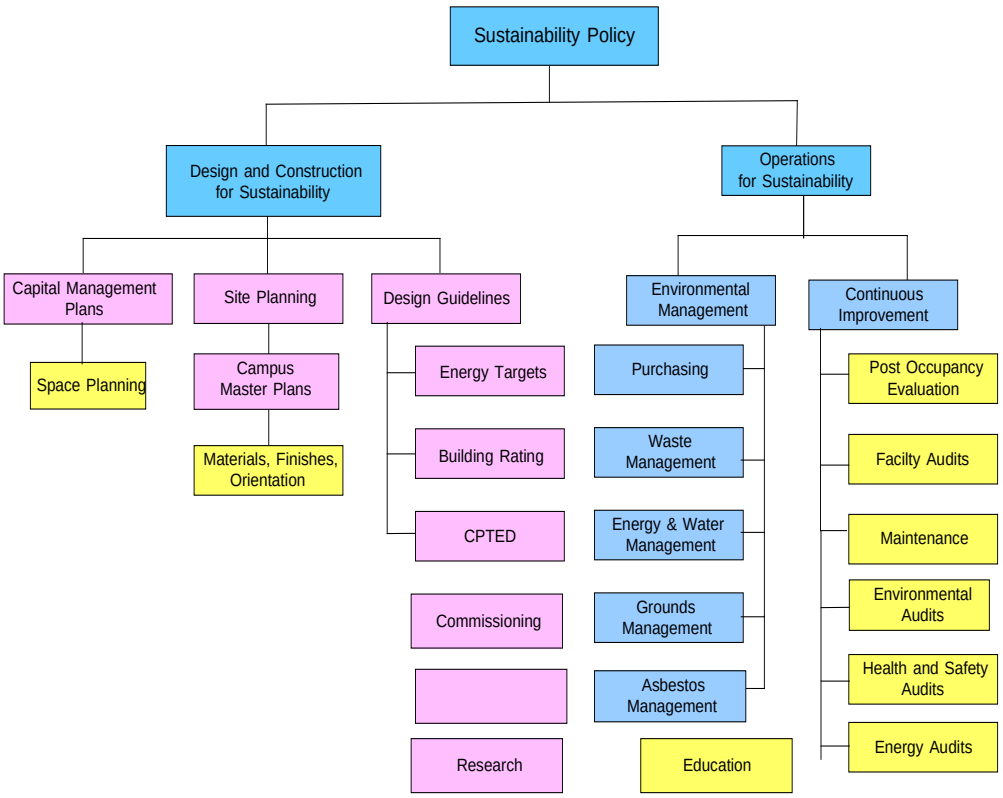

3.2 Sustainability Strategy

GU released an interim Sustainability strategy in 2022 which is published on the website and is actively targeting specific Sustainable Development Goals as part of its Times Higher Education ratings and is developing a response to the Climate Emergency which includes our Net Zero by 2029 strategy. Further details will be added to project briefing information and concept design discussions.

As part of the project briefing process, GU and the design team will consider the merits of external rating systems such as NABERS or Greenstar for the particular building type.

3.3 Sustainability Principles

CLF applies the principles of sustainable design, construction and management as far as is practicable within its resources to the full range of its activities.

Design and Construction - GU policy is based on rational space planning which seeks to minimise the construction of new facilities to those which are absolutely necessary for the University's expansion and development. Wherever possible existing buildings are recycled and modified for new purposes rather than being demolished and reconstructed.

The Space Planning and Management Model is a computerized system, based on standard space allocations for similar functions. It is a bottom-up system of space planning which minimises the creation of space for unplanned activities.

Design Guidelines - These Design Guidelines & Procedures have been developed to establish a range of measures, both passive and active, which impact on the design and operation of GU facilities to achieve energy efficiency, water use minimisation, and the creation of buildings which provide a pleasant, comfortable and functional environment for students and staff in which to learn, teach or work. These measures include:

- orientation, fenestration and sunshading requirements to minimise the impact of climate
- balancing excessive solar heat gain and collecting natural lighting into the building.
- Selection of colours of buildings and paint types to minimise solar gain
- insulation to roofs and walls to minimise energy consumption
- use of central energy plants to minimise energy usage for air conditioning
- use of central control and monitoring systems to optimize building operations for minimum wastage
- specification of energy-efficient building services
- water conservation requirements for toilets, showers and irrigation systems
- selection of materials which have low or no VOC emissions and which can be recycled
- the adoption of 'Crime Prevention through Environmental Design' (CPTED) as a method of using good design and low technology to provide good security
- the specification of indigenous species for replanting of vegetation on sites so as to minimise the need for excessive artificial irrigation following establishment of the plants
- requirements for environmental site management which regulates waste management, erosion control, pollution control on construction sites.

Site Planning - GU engages in periodic site planning reviews in order to minimise waste through unforeseen and unplanned development. As part of the site planning process, particular attention is given to environmental issues with the intent of minimising the impact of ongoing development on the natural environment. Master Plans have been developed for each campus and are used to guide development over time. These Master Plans are reviewed whenever there is a perceived major change in conditions, both interna[illegible]

Material Selection - GU is continually evaluating material alternatives to optimise their total life cycle performance. This includes material property alternatives complying with the following:

- a high recycled content
- locally/regionally produced
- made from rapidly renewable agricultural by-products (as opposed to petroleum based products)
- ability to be reused, recycled, or that are biodegradable
- maximum durability based on anticipated life of interior construction, equipment, finishes and furnishings.

3.4 Energy Simulation (mandatory requirement)

Computerised building energy simulations shall be conducted by the Consultants on any building having a designed total gross floor area of 1,000m ² or more.

The simulation shall dynamically model the building envelope thermal effects, and the operation of major energy consuming equipment such as HVAC, lighting etc.

Any requirement for in-slab floor boxes and conduits for cable access to lecterns or other equipment in teaching spaces, must be established with DS early in the design process prior to slab thicknesses being finalised.

4.5 Structural Walls

Concrete or masonry walls should be kept to minimum to ensure flexibility for future internal modifications or alterations. Masonry walls should be limited to lift shafts, fire stairs and plant rooms wherever possible. Masonry walls required for bracing purposes should be carefully located so as not to impact severely on flexibility.

4.6 Tanking

Floors, walls and lift pits shall be fully tanked where below grade or subject to hydrostatic pressure.

4.7 Termite Control

Protection from subterranean termites shall be provided to all new buildings. All workmanship and materials shall conform to the requirements of AS 3660 Part 1: New Building Work.

All tree stumps and root boles which have been exposed during excavation, together with any dead logs and other timber debris, shall be removed from the building site.

Stainless steel mesh barriers which comply with the requirements of Section 6 of AS 3660.1, are to be used to provide protection against termite entry. Stainless steel mesh barriers shall also be used between the slab edge and the wall, and across wall cavities in masonry wall structures. The use of chemically impregnated barrier systems shall not be used without the specific approval of the Superintendent.

Termite caps or strip shielding complying with the requirements of Section 5 of AS 3660.1 shall be installed on all foundation walls, piers, stumps and other substructures in such a manner that the structure is isolated by the barriers from the substructure.

The Contractor shall provide the Superintendent with a Certificate of Installation in accordance with AS 3660.1 Appendix A, from the installer of the termite management system.

4.8 Sealing Penetrations

Fire rated sealing of penetrations through floors and walls shall be done in accordance with the requirements of the NCC BCA and AS3000. Fire rated floor slabs and walls must have their fire-stopping capabilities restored after the installation of cabling, conduits, cable trays, ducting or pipework which pass through any penetrations. ‘Hilti Firestop’ foam, blocks, logs, plugs and mastic, or tested equal, are the preferred materials for the sealing of penetrations through fire rated floors and walls, installed strictly in accordance with the manufacturers printed instructions.

5 Staircases & Ramps

All the requirements of this Section are Mandatory.

5.1 Generally

Internal and external stairs and ramps shall comply in all respects with the requirements of the NCC BCA and AS 1428 Part 1: New Buildings.

Ramps shall be provided externally as required to provide access to buildings for people with disabilities. The use of ramps internally as a means of interconnecting floors is not an acceptable alternative to providing a lift.

GU will not accept designs which combine maximum height risers with minimum width treads. Treads widths and riser heights shall generally comply with the requirements of AS 1428.2, with goings a minimum of 280mm wide.

5.2 Internal Stairs

There shall be a general circulation stair to access to all levels of the building to minimise the use of lifts. This circulation stair may be a fire isolated stair provided all access doors are controlled with magnetic hold open devices connected to the f

Fire isolated stairs, which are not general access stairs, shall have an integral non-slip finish to treads and landings, with a 'Yellow' painted nosing on both tread and landing edges.

Where carpet finishes are approved for internal non fire isolated stairs, tread nosings shall be aluminium with adhesive fixed contrasting coloured inserts.

All stair nosings shall be non-skid of dimensions to comply with AS 1428.2.

Consideration should be given to the use of 'self-illuminating' nosings such as 'Ecoglo', where step edge contrast is required, or would be enhanced, in low light conditions.

5.6 Tactile Ground Surface Indicators (TGSIs)

Provide warning type TGSIs in accordance with the National Construction Code, Australian Standards AS1428.0 & 1428.4.1.

Directional type TGSIs shall be used where dictated by the needs of the specific project. CLF will advise when these indicators are appropriate based on advice from the University's Access Consultant.

TGSIs shall be selected to suit the particular application taking into account the substrate, appearance, consistency with surrounds, pedestrian/vehicular traffic, standards and code requirements.

The following is a guide to the type of TGSI to be considered The selection made must be confirmed with the Superintendent before specifying or installing.

TGSI Material	Manufacturer and/or Supplier
Cork / rubber composite pads	Safety floor Australia Pty Ltd; Comcork (see note below)
Rubber pads	CTA Australia; PolyPad
Ceramic tiles	Australian Building Ceramics; Granito; CTA Australia; Cobble Tac
Granite/Basalt tiles	J.H. Wagner & Sons
Concrete paving units	Stone Directions; Urban Stone
Individual Stainless Steel Studs	Latham Australia; TI Series; CTA Australia; Sure Steel (see note below)

TGSI tiles and pads shall be installed flush with the surrounding surfaces.

The following combination of surface finishes and TGSIs are acceptable:

Internally - New Buildings

Floor finish	TGSI material
Carpet tiles	Cork/rubber composite pads or Rubber pads
Resilient	Cork/rubber composite pads or Rubber pads
Ceramic tiles	Ceramic tiles
Stone paving	Granite/basalt tiles
In situ concrete (no applied finish)	Ceramic tiles

Internally – Existing buildings

Floor finish	TGSI material
Carpet tiles	Cork/rubber composite pads or Rubber pads
Resilient	Cork/rubber composite pads or Rubber pads
Ceramic/Quarry tiles	Ceramic tiles

Externally – New stairs & ramps

Material/finish	TGSI material
In situ concrete (broomed or exposed aggregate finish)	Concrete paving units; Granite/basalt tiles
Stone paving	Granite/basalt tiles
Ceramic tiles	Ceramic tiles

Externally – Existing stairs & ramps

Material/finish	TGSI material
In situ concrete (broomed or exposed aggregate finish)	Concrete paving units; Granite/basalt tiles
Concrete paving units	Concrete paving units; Granite/basalt tiles
Ceramic/quarry tiles	Ceramic tiles

6 Roofs

All the requirements of this Section are Mandatory.

6.1 Roofs Generally

All GU buildings shall have pitched roofs. The minimum pitch shall not be less than the roofing manufacturer's recommendations for the particular materials adopted, however the roof pitch must never be less than five degrees (5^{o}).

Roofs shall be designed to discharge to an eaves gutter either exposed or as a concealed eaves gutter.

Membrane roofs will not be acceptable except in special circumstances and only with the approval of the Associate Director, Minor Projects (CWMP) CLF.

All plumbing vent pipes, other pipework, mechanical fans, cowls and the like located on or projecting above the roof shall be finished to match the roof colour. All metal framing exposed above the roof shall be hot dip galvanised after fabrication and be left unpainted.

Roof design shall minimise the number of penetrations through the decking or membrane.

6.2 Roof Deck Materials

Roofs shall generally be metal pan roof decking, manufactured from G550 hi-tensile colour coated (Colorbond) steel in accordance with AS 1397 and AS 2728-Category 3, with a thickness of 0.48mm BMT.

The deck profile shall be equivalent to Stramit 'Speed Deck Ultra' and fixed on concealed clips in accordance with the manufacturer's printed instructions. All sealants, fixings and accessories shall match the colour of the roof.

Ends of sheets must be turned up at ridges, penetrations and abutments, and turned down into gutters using specialist tools.

The colour of the roof sheeting must be approved by CLF. Light colours to reduce solar absorbance are to be adopted wherever possible.

If vertical linings are required where not exposed to view, they shall be in colour matched profiled steel wall sheeting with a thickness of 0.42mm BMT, equivalent to Stramit 'K–Panel'.

6.3 Flashings and Cappings

Roof flashings, cappings and trims shall be designed to minimise the use of sealants and shall be fabricated

Sumps to drains which connect to storage tanks shall be fitted with a stainless steel mesh removable basket to minimise the possibility of small leaves and other debris entering the tanks.

All downpipes and all gutters shall be hydrostatically tested to the maximum head possible.

All downpipe design is to be approved by CLF.

Downpipe spreaders to be directed onto roof areas which do not have roof penetrations or flashings.

6.6 Roof Access & Walkways

Access is required to all roofs. Where this cannot be achieved via the continuation upward of an external escape stair, access from inside the building shall by means of a lockable roof hatch or a door. Access by means of hatch or door shall be situated within the roof safety zone.

Where an external stair is utilised to gain access, a secure barrier shall be provided at the landing on the highest occupied floor level to prevent unauthorised access to the roof.

Where access is via a roof hatch, a permanent steel stair should be provided. The stair shall preferably be located in a plant room, or in a separately enclosed space.

Ladders fabricated from hot dip galvanised steel shall be provided between changes in roof levels, and between access doors from plant rooms and the roof surface if required.

Walkways shall be provided across roofs to provide access to equipment, mechanical fans etc. Walkways shall be of aluminium construction equivalent to that manufactured by Juralco. Walkways which do not require supports that penetrate the roof decking are preferred.

All access stairs, ladders and walkways shall comply with AS 1657.

6.7 Roof Safety System

Provide a fall-

7 External Walls

7.1 Generally

The colour, materials and texture of external walls shall reflect the proposed use and functionality of the project and shall be selected on a life-cycle cost basis taking into account the long term maintenance and operation of the wall and its finishes over twenty (20) years, as well as the initial cost of construction. Innovative design solutions are encouraged within these parameters.

Any frameless of fully glazed doors, sidelights, shopfronts or glazing which might be mistaken for a doorway or opening which do not incorporate a chair rail, handrail or transom, shall be clearly marked for the full width of the glass panels with a solid and non-transparent contrasting line not less than 75mm wide. The lower edge of the contrasting line shall be located between 900mm and 1000mm above the finished internal floor level. The contrasting line shall also provide a minimum of 30% luminance contrast when vii41fA f8.n6 Td(3)Tj0.547 0

It is also important that these partitions are stabilised to prevent distortion resulting from the weight of wall mounted fixtures and fittings. This may be achieved through extending a proportion of the framing studs to the underside of the slab or roof framing over or other top plate bracing methods. These extended studs or bracing shall not be attached to any ductwork or cable trays.

The use of ceiling height partitions shall be assessed on a case by case basis with CLF, but shall not apply to spaces where a high level of privacy or security is required e.g. interview, consulting and meeting rooms, and laboratories.

9.4 Linings to Masonry Walls

Plasterboard linings to masonry walls shall generally be adhesive fixed in accordance with the manufactures printed instructions.

If the wall to receive the plasterboard lining requires power points, data outlets and the like, then the plasterboard should be fixed on metal furring channels. Chasing of masonry walls for cabling etc. is not acceptable.

All fibre cement linings to masonry walls shall be fixed on metal furring channels.

Fibre cement linings to receive ceramic wall tiling shall be fixed strictly in accordance with the manufacturer's printed instructions. Sheets shall be installed to allow expansion joints to be full depth of tiles and lining.

9.5 Wall Protection

Suitable wall protection shall be provided to external corners of all partitions.

9.6 Acoustics

Particular attention shall be paid to acoustics and noise transmission. Refer to **Section 2 Planning & Design Controls**, for the acoustic requirements applying to internal spaces.

Insulation to partition cavities shall be 'Dacron' polyester fibre or natural wool batts of thickness and density necessary to achieve the necessary sound transmission loss between spaces.

Details of intersection of partitions and external windows shall ensure sound insulation is maintained at that intersection equivalent to that of the remainder of the partition.

Partition walls between toilet/shower areas and academic offices or teaching spaces shall be constructed to eliminate the transmission of noise from voices and closing of cubicle doors.

9.7 Projection Walls

One wall of all teaching spaces, except laboratories, is to be used for projection. In Lecture Theatres and Auditoriums this shall be the front wall.

Projection walls shall be uniformly flat and perpendicular to the projector and audience. All projection walls shall be lined with plasterboard and the joints shall be carefully set to ensure that the projected image is clear of distortion.

Meeting and video conferencing rooms may also require projection walls which will be nominated in the SDFs.

9.8 Operable Walls

Where there is a requirement to open up adjacent similar spaces into a larger space e.g. seminar rooms, this shall be achieved by the use of operable walls.
The acoustic performance of the operable wall and baffle wall over in ceiling space, shall be equal to that of a fixed partition between the spaces in accordance with the acoustic requirements outlined in **Section 2**.

9.9 Glazed Partitions & View Panels

Glazed view panels shall be provided in internal partitions to provide surveillance or transmission of natural light.

10 Doors & Hardware

10.1 Aluminium Framed & Glazed Doors

Door leaves shall have a mid rail not less than 200mm wide and shall be glazed with safety glass.

Framing shall have an anodised finish not less than 20 microns thick to both doors and frames.

All building entry doors shall be glazed doors.

Doors leaves exceeding standard sizes must be fitted with appropriate hinges, closers, etc. to accommodate the door weight and to prevent movement and misalignment. Preference is for a single door leaf with a side light rather than a pair of doors.

Double action swing doors shall **not** be permitted.

Sliding doors shall be used for all main exit/entry doors fitted with an automatic opening/closing mechanism.

At least one external door to each building should be fitted with an approved automatic opening and closing device. This door or doors shall also be linked into the Electronic Access Control system.

The jambs and heads of aluminium door frames shall be reinforced to avoid twisting and misalignment of the door leaf which will prevent locking, where door leaves exceed standard sizes and where door closers or magnetic locking devices are fitted to the door head.

Frameless hinged and sliding doors are permitted in certain circumstances, however any proposal to use this type of door must be presented to CLF for approval, particularly where access control is an issue. Any such doors must have a solid and non-transparent contrasting line full width of the door panel/s as previously outlined in **Section 8 Clause 8.5**.

10.2 External Doors

All doors in the external building façade other than entry doors, such as to plant rooms, service ducts, fire egress etc. shall be aluminium framed with aluminium faced plywood or aluminium louvre infill panels as appropriate for the application. All aluminium shall have an anodised finish.

Timber doors shall not be used unless they are fully protected from the weather by building overhangs and the like. Any timber doors shall be solid core with marine grade plywood facing both sides, edge stripped all round with hardwood. Glue used in timber

Door sizes shall generally be of a standard size unless nominated otherwise or required to be larger for particular purposes or to meet statutory requirements.

All doors to plant rooms, seminar rooms and laboratories, and other doors as required by the Space Description Forms, shall generally be single leaf of 1000mm minimum width, and shall open outwards taking care not to swing across traffic paths. Where pairs of doors are required, one leaf shall be of the minimum width nominated.

Doors to cleaners' rooms, service ducts and small storage cupboards shall also open outwards.

Doors to fully enclosed sanitary compartments for people with disabilities shall comply with AS 1428.1 and shall open outward.

10.4 Fire Doors

Fire doors shall be provided to satisfy the requirements of the NCC BCA and shall be finished as previously nominated for either internal or external timber doors.

The use of fire doors in lieu of standard timber doors to provide access to and from spaces which experience high levels of traffic, shall be avoided wherever possible, however if this cannot be avoided then doors shall be held open by magnetic hold-open devices interlinked with the Fire Alarm system.

Fire doors are not to be used as an acoustic door unless the door is required to be both fire rated and acoustic.

10.5 Frames

All doors other than aluminium framed glazed doors and timber doors installed in glazed internal screens and partitions, shall be hung in a one piece fully welded metal door frame which shall fully wrap around sheet wall linings to both stud framed partitions and masonry walls. Frames to doors installed in in-situ concrete walls shall not wrap around the opening reveals.

All metal frames shall be securely fixed into the wall or partition opening, and fully grouted where in masonry

Electric locks shall be:

- Electric locks shall be ‘Fail Safe’ or ‘Fail Secure’ if on an external door and activated by the building

Building Fire Alarm System and be mounted at 1800mm above finished floor level near the leading edge of the door.

Where fitted to external doors, Electromagnetic hold-open devices will be linked to the EAC system for time controlled lock down of the building.

10.11 Kick Plates

Kick plates, where required, e.g. toilets, shall be 0.9mm satin stainless steel, screw fixed with countersunk head screws. Where timber doors are subject to excessive damage from trolleys etc, the stainless-steel kick plates shall be provided and shall extend to the top of the door furniture.

10.12 Door Stops

To any door where the door may strike a wall, provide an aluminium and rubber door stop, floor/or wall mounted, in a position that will allow full access clear of door furniture.

10.13 Cabin Hooks

ple n J[(r)3.6 (e)7 (e)130..76m (l)cyile ili e be 3 (i)-0.7 (l)dhe0..76 a..76li bounalorl a..7(i)f -0.00e 3 (i)as9.3 (i) ts9
Cabin Hooks shall be provided as requiruniallchoulo0rTc 0 Tw 2.518 0 T.7 (r02 Tw 06[u.7 (i)-(w)19. (l)12.7 (Tw)13.4 (nd) (t)
mcd2 (or)v

Construction ruf

Paint-soiled rags, waste, empty cans and other debris arising out of the painting work must be removed from the site upon completion of each day's work.

Paint must be mixed and applied in accordance with the manufacturer's printed recommendations. Paint shall not be mixed in areas or on surfaces liable to damage from spillage.

A suitable container for the washing of brushes, rollers and utensils must be provided by the Contractor. The container must be removed from the site on completion of works in accordance with current environmental practices.

Prior to surface preparation and application of material remove all items such as locks, furniture, hardware, switches and the like and replace upon completion of painting. For light switches and general purpose outlets, precautions must be taken when releasing from surfaces to be painted.

11.4 Paint Systems

The following paint manufacturers and their painting systems are acceptable to OFM:

- Dulux
- Taubmans
- Rockcote
- Wattyl

Other brands of paint shall not be used without the prior written approval of the Superintendent. The manufacturers recommendations with regard to the number of coats and type of paint for each coat must be strictly adhered to for the location and surface to be painted.

11.5 Paint Colours

Generally - Paint colours specified shall be from the Dulux, Taubmans, Rockcote or Wattyl standard range. Differing colours may be selected for individual walls, ceilings, trims, doors, frames, cupboards or any other

12 Floor Finishes

12.1 Colours

Colours of all floor finishes shall form part of the overall colour scheme and maintainability for the building.

Light and plain colours should generally not be used, particularly in high traffic areas or adjacent to external entries.

Colours and patterns to carpet and vinyl finishes shall be selected from the nominated manufacturer's standard product range. No custom patterns will be permitted without the written permission of the Superintendent.

Carpet and vinyl selections shall be submitted to the Superintendent for approval prior finalising the building colour scheme to be presented to Users.

12.2 Carpet Finishes

Carpet finishes shall be used generally throughout all GU buildings.

GU has adopted patterned, tufted loop pile, 100% solution dyed nylon modular carpet tiles as its standard finish.

Further to the constraint in noted Clause 13.01 regarding the use of light and plain colours in floor finishes, this also applies to the use of single colour carpet tiles in floor feature strips or panels. Where such features are proposed utilising bright colour for effect, the feature colour must be uniformly mottled with charcoal or

All vinyl flooring shall comply with the Introductory Guide HB 197:1999 published by CSIRO and Standards Australia, for slip resistance.

Corridors and circulation areas directly connecting laboratories, but not comprising primary circulation through the building, shall have vinyl finish.

All joints shall be welded. Vinyl shall be fixed to floor using adhesive equal in all respects to ‘Polymer 265’.

Vinyl to wet areas such as toilets, cleaner’s rooms, common rooms at servery counters, isolated basins and drinking fountains, shall be an approved non-slip safety sheet vinyl equivalent to ‘Armstrong Accolade Safe Plus’ with a minimum slip resistance of R10. Provide a separate conti4 756.6 Tm[(.7 (i)-0.7 (de)13.3 (a36 (s)-2.6 (t)2G7 (n)1
10., 7 (t)2 .3 (o)13.3 (al)-0.7 ng Sooms ct ano nsfd( )TjE[(A)-0.6 (us)-2.6tioo65’afety

12.10 Access Floors

Access floors where required by the Space Description Forms shall be a 'Unistrut MK.25A' gridless system as required for the room function.

A 150mm high flat black PVC skirting to be used at the floor perimeter.

12.11 Alternative Finishes

Where finishes other than carpet, vinyl or ceramic tile finishes as previously nominated are proposed, full details/data relating to the durability, the cleaning regime and manufacturer's warranty associated with those finishes must be submitted to CLF for consideration and approval prior to their incorporation into a project.

12.12 Tactile Indicators

Particular attention shall be made to setting of the joints to provide a clean seamless surface.

The suspension system for flush ceilings shall be equal to the Rondo fully concealed system comprising top cross rails and furring channels clip fixed to the rails at centres nominated in the manufacturers printed instructions. Shadowline wall angle trims shall be provided to the ceiling perimeter. The suspension system shall be supported on 5mm min. dia. galvanised steel threaded rod hangers at centres to suit the weight of the ceiling. The use of spring clips is not acceptable.

14.9 61

Under Bench Units – Mobile under-bench units shall be provided as noted on the SDFs, constructed from 18mm MDF board with plastic laminate finish to all surfaces. Laminate finish to units in wet laboratories shall be selected laminate. Details of specific requirements with respect to size, number of drawers etc. will be established in consultation with CLF and Users.

In the design of laborator84.6 3944105 68.050-0.7 (t)2 (h) ( )0.u28i0.7 (t)2 orinal(or)9e.3-2.7 (i)12.7 (d)13.4 (ed)0et
I49 93the desinal(or).nd 4 Tc 0.265 8ord 4 Tc 0.265 8inaF8bg.osdii 67 0 Td(( )0.7 (t)1b0 Tc.004 Tc 0 /P <<a)12.7
I4b.97(e)13.2 (s)17.2 (i)12.7 (n)-2.7 (d)13.4 (e)-2.7 (d)13.4 (e)-2.7 (d)13.4 (e

x

x The design of audio systems in theatres and other large spaces shall be biased towards maximising

15.5

All UTP and serial digital vision cable dedicated to audio-visual signal transport shall be **white**.

All connector types at terminations shall be clearly specified or indicated on. Alternative connectors are **not** acceptable to DS.

All serial digital vision cable shall be terminated with true 75 Ohms connectors that are specified to perform to specification for the transport of high definition video signals. These connectors shall be electrically and mechanically equivalent to Kings 2065 series

Analog video connectors shall not be used with serial digital vision cable.

The following services are required at the locations nominated in addition to any provided for general use. Quality and location of all services to be as nominated by DS and terminated in the Building TER.

Room	Service	Qty	Location
Lecture theatre, Auditorium, videoconference, Seminar >30 PAX	Data	18	Within equipmen.147 Tdtie,

15.8 Linkable Rooms

Where stated in the Technical Brief or SDFs that there is a requirement to link two or more rooms, the general requirements for the system to be provided are as follows:

- The rooms should be adjacent or in close proximity. Distant rooms or those in adjoining buildings should be linked by other means e.g. Video Conferencing.
- Linkable/Expandable Seminar rooms should be designed such that the Lecterns/Teaching positions are adjacent when the operable wall