Table of Contents

1 Interpretation and Definitions 12
1.1 Purpose of this document.....12
2 Tw 0.267 0 Td (.....)Tj9.21.....

17.6.4 Vacuum 113
17.6.5 Reverse Osmosis Water....113
17.6.6 Isolation of Piped Services 114
17.6.7 Outlets to Piped Services 114
17.6.8 Identification of Pipework....114
17.6.9 BMS Alarm Points....114
17.7 Commissioning and Handover....114
17.7.1 General Requirements....114
17.7.2 Fume Cupboards....115....115
17.7.3 Piped Services....115
17.8 Depiction of Airflows on Mechanical Drawings for Consultants & Contractors 116
17.8.1 Requirements for [illegible]

....t..11 em....4.

20.5.14 Access to WAPs in Ceiling Spaces....159
20.5.15 Remote or Difficult Placement WAPs....159
20.5.16 Video Conferencing Rooms....159
20.5.17 Learning Centres....160
20.5.18 Space Utilisation & Occupancy Monitoring....160
20.5.19 Mobiles Infrastructure....160
20.6 Equipment and Installation requirements....161
20.6.1 Materials....161
20.6.2 Commscope Cabling Part ID's....162
20.6.3 Mechanical Protection of Cables....163
20.6.4 Cable Ducts....163
20.6.5 Cable Supports....163
20.6.6 Cable Hangers....163/T/TT2 1e(6.)2
20.6.7 Conduits....164
20.6.8 Separation....64 163....164 Tw 34 1.679.....
20.6.9 Scheduling....164
20.6.10 Partner Sites.... 163....04 Tw 34 1.679

22.9 Lift Pits and Lift Shafts....179
22.10 Machinery Room/Machinery Space....180
22.11 Lift Performance....180
22.12 Telephone....181
22.13 Emergency Lowering Power Pack....181
22.14 Workshop Drawings....181
22.15 'As Constructed' Drawings....181
23 Landscaping....182
23.1 Generally....182
23.2 Red Imported Fire Ants (RIFA)....182
23.3 Water Supply to Hosecocks, Drinking Fountains and Irrigation Systems....182
23.4 Hosecocks....182
23.5 Landscape Drainage....182
23.6 Topsoil & Planting Soil....182
23.7 Turf 183
23.8 Planting....183
23.9 Garden Mulch....183
23.10 Landscape Timber....184
23.11 Garden Edges....184
23.12 Retaining & Planter Box Walls....184
23.13 Paving & Footpaths....184
23.14 Irrigation System Generally....185
23.15 Irrigation System Materials & Equipment....185
23.16 Irrigation System Installation....186
23.17 Landscape Furniture....188
23.18

Modifications

Version	Issue Date	Amended Sections / Clause(s)	Comment
22.2	December 2021	Sections: 21.00 Communication and Data Services – significant rewrite	All additions and changes are highlighted Yellow in individual sections.
22.3	June 2022	Sections: 2.10 Space Management Procedure 6 Roofs 16 Hydraulic Services - significant rewrite 17 Mechanical Services 18 Fire Services 19 Electrical Services 22 Lifts 30 Sustainability Matrix	

2 Planning & Design Controls

All the requirements of this Section are Mandatory.

2.1 Site Planning Controls

The University has approved Master Plans for all of its Campuses.

Potential building development is an essential element of these Plans, and they indicate zones where buildings may be built on all Campuses.

These Master Plans undergo periodic review and copies of the current version of each Plan are available upon request.

2.14 Space Management Procedure

GU has developed space guidelines to provide a method by which rational planning and management

Provision for isolation of all incoming services into the building is essential. The isolating valves/provisions shall be readily accessible without ladders or other access equipment. This valve room may be incorporated into a service duct or services plant room and is ideally situated at ground level close to the building perimeter to minimise runs within the building prior to the isolation valves. Meters, irrigation controls and RPZDs may also be located within this room.

2.19 Electrical Riser Cupboard

A dedicated electrical services riser shall be provided for the reticulation of electrical services throughout the building. The minimum size of the electrical riser shall be 1500mm x 500mm. Provide min 600mm long door bolts or a pull chain to operate door bolts.

2.20 Telecommunications Equipment Rooms

All new buildings require Telecommunication Equipment rooms (TER) to comply with the requirements laid down in Section 2 0 Communication & Data Services.

2.21 Waste Collection and Gas Bottle Storage

Each building shall be provided with a combined general and recyclable waste collection station at each level. The stations shall be easily accessible to the occupants and preferably located in a recess to a corridor wall. The number of general and recyclable waste bins at each station shall reflect the volume and type of waste generated by the activities on that level.

Where the provision of industrial waste containers and wheelie bin storage is associated with a project, particular care is to be taken in the design of these areas to ensure unrestricted access for waste collection vehicles while at the same time providing suitable visual screening from the campus generally.

Adequate provision shall be made for the secure and ventilated storage of gas bottles whether located internally or externally of a building. This clause applies only to buildings which require medical/laboratory gases for teaching or research purposes. In line with our Net Zero road map, there will be no further new LPG installations for building heating or retail tenancies. Refer to Subclause 17.5.2 in Section 17 Mechanical Services.

2.22 Corridors

Wherever possible, corridors shall terminate at the external wall of the building to enable natural light to be admitted into the corridor space through windows in the building fac>>BDC 0pld ld5.4 (7)13.6 (bui)12. (o)]TJ n1 Tf 0htad06 (

2.32 Laboratories

A Laboratory is classified as any building or part of a building used or intended to be used for scientific or technical work which may be hazardous, including research, quality control, testing, teaching or analysis.

Such work may involve the use of chemicals including dangerous goods, pathogens and harmful radiation, quarantine materials, or processes including electrical or mechanical work which could also be hazardous.

gdTJ 4EgdTJ 4E

Other considerations include:

- Rear wall echoes in lecture theatres
- Standing wave or room modes in recording or practice studios
- Flutter echo in performance spaces.

These acoustical issues must be evaluated and addressed on a project-specific basis using a specialist acoustic consultant as required.

Construction Noise – Construction activities inherently produce noise. The levels of noise and their intrusiveness are generally most significant during the early stages of a new project (e.g. excavation and rock breaking) and diminish as the project advances.

Given the intensive nature of campus development, construction noise can be a significant impact on adjoining university buildings. Designers must consider the potential noise impacts of design options (e.g. extra basements extend the excavation period and the likely duration of noise impacts).

As a minimum, compliance with AS 2436 is required. Particular consideration(o)13.3uiron d anitnia3.4 (x)-2.7 EMC /P 2.7 ()) (
Asi.3 (i)3(i)12.7 oC7 (sho2.7 (i)12.7 (dere(dev)10.7 (e(c)10. (d r)3.7 (o)13.3
3 (i)-cii nDC -36.08 -1.1 EMC -7 (11 (08 (12 (y)J T042.7 o)(a2)-0

3 Designing for Sustainability

3.1 General

Griffith University has been committed to sustainable development through many of its practices and policies, both written and un-written for many years.

Sustainable development has been defined as '*development that meets the needs of the present without compromising the ability of future generations to meet their own needs*'. (from 'Our Common Future', Report to the World Commission on Environment & Development – 1987)

The range of application of a well-developed sustainability policy is shown in the following diagram.

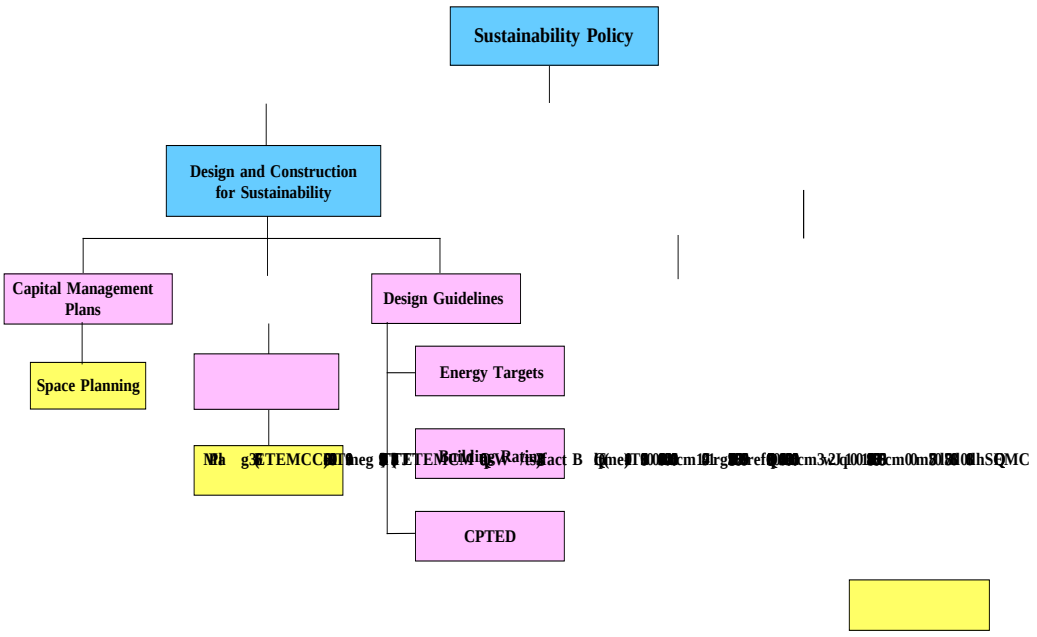

3.2 Sustainability Strategy

GU released an interim Sustainability strategy in 2022 which is published on the website and is actively targeting specific Sustainable Development Goals as part of its Times Higher Education ratings and is developing a response to the Climate Emergency which includes our Net Zero by 2029 strategy. Further details will be added to project briefing information and concept design discussions.

As part of the project briefing process, GU and the design team will consider the merits of external rating systems such as NABERS or Greenstar for the particular building type.

3.3 Sustainability Principles

CLF applies the principles of sustainable design, construction and management as far as is practicable within its resources to the full range of its activities.

Design and Construction - GU policy is based on rational space planning which seeks to minimise the construction of new facilities to those which are absolutely necessary for the University's expansion and development. Wherever possible existing buildings are recycled and modified for new purposes rather than being demolished and reconstructed.

Fire isolated stairs, which are not general access stairs, shall have an integral non-

Externally – Existing stairs & ramps

Material/finish	TGSI material
In situ concrete (broomed or exposed aggregate finish)	Concrete paving units; Granite/basalt tiles
Concrete paving units	Concrete paving units; Granite/basalt tiles
Ceramic/quarry tiles	Ceramic tiles

6 Roofs

All the requirements of this Section are Mandatory.

6.1 Roofs Generally

On some campuses, ‘Decktite’ flashings and sealants are subject to damage and removal by birds. Where this is a problem, a Colorbond steel shroud shall be installed to protect the ‘Decktite’ flashing, and exposed sealants should be protected by Colorbond metal trims. The nominated Griffith Project Manager should be consulted as to the likely requirement for these measures.

6.4 Gutters

Generally – Gutters shall be installed on all buildings unless otherwise advised by CLF.

Box gutters ***shall not*** be installed unless there is no other viable design solution.

Flow rates (l/sec) and average rainfall intensities (ARI) are to be shown on the design drawings for all downpipes, spreaders, balcony drains, roof deck drains, overflow’s, etc.

Where flows exceed the maximum flow rates indicated in AS3500.3 then a certified performance solution and associated form 15 must be provided in accordance with the National Construction Code.

Materials – All gutters including accessories shall be fabricated from Type 304 stainless steel with a minimum thickness of 0.9mm with a pacified polished finish. All joints shall be riveted and silicon sealed. In corrosive environments such as the Gold Coast campus, gutters shall be fabricated from Type 316 stainless steel

Eaves Gutters – Eaves gutters shall be half round to match existing c347 0 Td ( )Tj g(c)10.70.004 Tc -0.002 0 -1-0.002 Tw 4
envcp35 T2 (2)2a(e3)-2.5 (he)-1(r)2.768 (h.28 0 Td [(r)3

Sumps to drains which connect to storage tanks shall be fitted with a stainless steel mesh removable basket to minimise the possibility o

7 External Walls

7.1 Generally

The colour, materials and texture of external walls shall reflect the proposed use and functionality of the project and shall be selected on a life-

8 Windows

8.1 Generally

Any frameless of fully glazed doors, sidelights, shopfronts or glazing which might be mistaken for a doorway or opening which do not incorporate a chair rail, handrail or transom, shall be clearly marked for the full width of the glass panels with a solid and non-transparent contrasting line not less than 75mm wide. The lower edge of the contrasting line shall be located between 900mm and 1000mm above the finished internal floor level. The contrasting line shall also provide a minimum of 30% luminance contrshalontrn(g)13.3.pr.3 (a m)1004 Tc -0.042 T3pe T

It is also important that these partitions are stabilised to prevent distortion resulting from the weight of wall mounted fixtures and fittings. This may be achieved through extending a proportion of the framing studs to

10 Doors & Hardware

10.1 Aluminium Framed & Glazed Doors

Door leaves shall have a mid rail not less than 200mm wide and shall be glazed with safety glass.

Framing shall have an anodised finish not less than 20 microns thick to both doors and frames.

All building entry doors shall be glazed doors.

Electric locks shall be:

- Electric locks shall be '*Fail Safe*' or '*Fail Secure*' if on an external door and activated by the building Fire Alarm System, as determined by CLF. If the internal and external handles are secure, a key override must be installed on both sides, however if the inside handle is free and the outside handle is secure, a key override is to be installed on the outside only unless otherwise advised by the Manager Security & Control Systems.
- Mortice locks and magnetic locks shall be as nominated in Appendix 1 of the *'Griffith University Electronic Security Systems Specifications & Installation Guidelines'*.

Note: Drop Bolts are not to be installed in the mid rails of aluminium doors.

Where electronic locks are installed, any required card readers shall be located so as to be accessible to people with disabilities, and where possible installed on a solid or sheeted walls and not on glass walls with

/<E078></M004534

Building Fire Alarm System and be mounted at 1800mm above finished floor level near the leading edge of the door.

Where fitted to external doors, Electromagnetic hold-open devices will be linked to the EAC system for time controlled lock down of the building.

10.11 Kick Plates

Kick plates, where required, e.g. toilets, shall be 0.9mm satin stainless steel, screw fixed with countersunk head screws. Where timber doors are subject to excessive damage from trolleys etc, the stainless-steel kick plates shall be provided and shall extend to the top of the door furniture.

10.12 Door Stops

To any door where the door may strike a wall, provide an aluminium and rubber door stop, floor/or wall mounted, in a position that will allow full access clear of door furniture.

10.13 Cabin Hooks

Cabin Hooks shall be provided as required to doors without door closers.

10.14 Security Door Viewer

Doors to meeting rooms, video conferencing rooms and other specialist spaces shall be fitted with a security door viewer reverse mounted for viewing into the space at 1500mm above the finished floor level.

10.15 Acoustic Seals

Where acoustic seals are required to doors to achieve the acoustic performance of the wall in which they are installed, these seals shall be fitted as follows:

- Seals to the bottom edge of the door shall be surface mounted and not rebated into the face of the door
- Where heavy duty acoustic seals are required to the door perimeter, the door frames shall have plain jamb and head sections and the seals shall be planted on the frame to form the door stops

Acoustic seals shall not be fitted to the bottom edge of doors to offices.

10.16 Automatic & Special Door Operating Systems

Automatic doors shall comply with the requirements of AS 5007-2007 Powered Doors for Pedestrian Access & Egress.

The manufacturer and installer shall supply documentation for the installation, technical data, acceptance tests, commissioning, operation, use and maintenance, including servicing and troubleshooting instructions in case of failure.

The operating mechanism shall be able to interface with electronic access and fire control systems. The door shall be compatible with a manual Request to Exit (REX) button and also have the provision for a dual input door override from both the REX button and the access control system. The rechargeable battery back-up module shall be self-monitoring and capable of sustaining full operation of the door for a minimum of two (2) hours.

Proposed operating mechanisms shall be submitted to CLF for examination and approval.

Refer to Section 2 Clause 2.05 for details of the special electric operating system required to the PWD toilet on the main entry level of each building.

10.17 Keying System & Keys

Only master keying shall be used. Maison keying will not be approved.

The lock/hardware schedule will be prepared by the architect in consultation with the Superintendent as per the GU Key Control Policy.

Construction cylinders will be used during construction of any new buildings or alteration works.

At practical completion of the construction and before handover to GU, the construction cylinders shall be removed and replaced with barrels and keys to one of the following University Restricted series:

Nathan	Abloy Pro-tec profile
Mt Gravatt	Abloy Pro-tec profile
Logan	Abloy Disc Pro profile
Qld Conservatorium Griffith University	Abloy Pro-tec profile
Queensland College of Art South Bank	Abloy Pro-tec profile
Gold Coast	Abloy Pro-tec profile

The Contractor shall source all final keys and barrels from the University's Locksmith, John Barnes & Co.

The standard number of keys to be cut is to be set out in the Lock Schedule.

All keys shall be stamped with a continuous numbering system for that campus by the lock cylinder supplier. These numbers are to be entered on to the Lock Schedule.

Paint-soiled rags, waste, empty cans and other debris arising out of the painting work must be removed from the site upon completion of each day's work.

Paint must be mixed and applied in accordance with the manufacturer's printed recommendations. Paint shall not be mixed in areas or on surfaces liable to damage from spillage.

A suitable container for the washing of brushes, rollers and utensils must be provided by the Contractor. The container must be removed from the site on completion of works in accordance with current environmental practices.

Prior to surface preparation and application of material remove all items such as locks, furniture, hardware, switches and the like and replace upon completion of painting. For light switches and general purpose outlets, precautions must be taken when releasing from surfaces to be painted.

11.4 Paint Systems

The following paint manufacturers and their painting systems are acceptable to OFM:

- Dulux
- Taubmans
- Rockcote
- Wattyl

Other brands of paint shall not be used without the prior written approval of the Superintendent. The manufacturers recommendations with regard to the number of coats and type of paint for each coat must be strictly adhered to for the location and surface to be painted.

11.5 Paint Colours

Generally - Paint colours specified shall be from the Dulux, Taubmans, Rockcote or Wattyl standard range. Differing colours may be selected for individual walls, ceilings, trims, doors, frames, cupboards or any other distinct element of the building. All colour schemes are to be approved by the Superintendent prior to issue.

Specifically -The wall colour to Video Conferencing Rooms shall be ‘Taubmans Blue Monet T69-6A’ or a colour approved by DS.

Paint finish to the ‘Projection Wall’ in Lecture Theatres and Seminar Rooms shall be a flat seamless finish in the ‘white’ to ‘off white’ colour range to the approval of DS.

11.6 Ceramic Wall Tiles

The use of ceramic wall tiles shall generally be limited to applications where other impervious materials are not suitable. Where ceramic tiles are used internally as a wall finish, they must not be adhesive fixed directly to off form concrete surfaces or masonry, but shall be fixed to a fibre cement sheet substrate as outlined in Section 10 Internal Walls & Partitions.

Wall tiles shall be glazed or semi glazed with grouting in a dark colour. ***White grout shall not be used.***

As a minimum, provide sealed expansion joints at all internal angles and abutments with door frames. Joints shall be full depth of tiles and wall linings.

11.7 Sealants

Sealants shall be selected to be appropriate for their application and shall be colour matched to the finished surface.

11.8 Decorative Wall Finishes

Where decorative wall finishes are used in public foyers, waiting areas, lift lobbies and the like, they must be durable, easily cleaned and impact damage resistant.

12 Floor Finishes

12.1 Colours

Colours of all floor finishes shall form part of the overall colour scheme and maintainability for the building.

Light and plain colours should generally not be used, particularly in high traffic areas or adjacent to external entries.

Colours and patterns to carpet and vinyl finishes shall be selected from the nominated manufacturer's standard product range. No custom patterns will be permitted without the written permission of the Superintendent.

Carpet and vinyl selections shall be submitted to the Superintendent for approval prior finalising the building colour scheme to be presented to Users.

12.2 uominatedH0 -1.p-3 (i)1omi12(m)-3 (p)13.3-79 >>BDC 0.004 Tc 0.025 Tw 31104 Tc -0.002 Tw 0.147 -1.16 Td [(57

14 Fitments

14.1 Generally

Joinery fixtures and other fittings shall generally be o

Furniture and fittings shall generally be proprietary loose items however, to maintain the integrity of each zone in the Centre, it may be necessary to utilise custom built-in fixed furniture or select loose furniture items which are capable of being fixed in position.
This particularly applies where furniture items are intended to be used in conjunction with computing equipment which requires cable connections e.g. computer tables to the Individual Study Zone or Team Study Booths.

14.10TT1 1 Tf -0.002 T t518 Td ( )Tj 0.004 Tc -0.004 5w 0.26374 Td [(ntK)1 (d i.3 (a)tc)5.8he osd &d T16 5e o re oe ars

In general, each laboratory shall have a minimum of one workstation per 40 users or part thereof which is adjustable to allow use by a person with a disability.

The most common problem for people with disabilities in laboratories is the height of working surfaces and the inadequacy of space below the surface. Laboratory spaces are usually designed for standing work which limits their use by those who use wheelchairs or have poor balance, co-ordination and endurance.

Flexibility of design, including adjustability, helps to fit the working environment to the range of users. One workstation per 40 users should be designed to be easily adjustable by the user to enable a full range of bench heights to be used giving access to all services. The design should also address accessibility for people with disabilities to items such as fume cupboards and sinks.

Some general principles for consideration in fitment design are as follows;

Bench Height - Although standard heights of wet laboratory benches are normally high enough, if unobstructed, to allow a wheelchair to fit below the bench, they may be too high for wheelchair users. Reference should be made to Ao 13.3 (l)-0.6 .7 (hou)13.3 (l)-0.6.6 (tf)2 (er)3.6 ((m).4 (o)13.0.198 Tw -8 ( )15.3 (oer)3.6 ((m0.6

Toilet Cubicles and Urinals:

- ’ stainless steel (304) shelf with satin finish 500 mm long, mounted on the wall with 20mm matching cylindrical spacers, between urinals and above WC cisterns for the placement of books, handbags etc by persons using the facilities.
- Regal DJRTDPSW dual roll toilet tissue dispenser
- Door bumper and hook to cubicle door (c.p.).

Unisex toilet for people with disabilities:

- Grab rails as required by AS 1428.1
- 300mm long Grab rail to back of outward opening door as a pull handle
- Aluminium framed mirror 600 x 1000mm high with bottom edge abutting top of wash basin approx. 800mm above f.f.l.
- Deb 2127 soap dispenser mounted over basin
- ‘Bradley 756’ stainless steel (304) shelf with satin finish 500 mm long, mounted on the wall with 20mm matching cylindrical spacers
- Dyson Air Blade surface mounted automatic electric hand drier with white epoxy paint finish dual roll toilet tissue dispenser
- Coat Hook (c.p.), 2 No.
- wall mounted folding baby change table (at Ground Level of building only)

Shower recess:

- soap holder in accordance with AS 1428.1
- Coat hooks (cp), 2 No.
- Grab rails in accordance with AS 1428.1
- wall mounted stainless steel folding slatted bench seat
- stainless steel (304) shelf 500 mm long as previously described.

14.15 Hand Wash Stations

14.19 Waste & Recycle Bin Enclosures

Internal bin enclosures shall suit 80 litre

- The design of audio systems in theatres and other large spaces shall be biased towards maximising coverage and intelligibility whilst providing high quality audio for the majority of users.
- In specialist spaces (eg: cinema, screening rooms, boardrooms) a custom sound system will be developed to best reflect the primary purpose of the facility.

15.2.2 Audiovisual System Design Documentation

Unless directed otherwise by CLF, the system design and specification of AV systems for projects shall be undertaken by DS in conjunction with the specialist Acoustics Consultant.

Appropriate documentation will be provided by CLF to enable the Contractor to obtain competitive quotations for the supdes q8(t)2 (he C) (o.6 (u)13. [(34(n c3 (i)-0 t)2 (he C10.7 (er >>BDC re W n q1)i)12.7 (on)3.7 ( )0.6 (t)y2.6 (

15.5 Master Antennae Television (MATV) and Cable Television distribution

15.5.1 General Requirements

An MATV system for UHF and cable television signal reception shall be provided on an as needs basis only. Where required, the system shall comprise all antennae, amplifiers, splitters and other components, necessary to provide noise and interference free reception of all available digital television transmissions at each outlet.

The Contractor may use a specialist Subcontractor other than the specialist AV equipment installer to supply and/or install the MATV system subject to the approval of the Superintendent.

MATV outlets shall be provided within the equipment rack space in all Lecture Theatres, Seminar rooms, Meeting Rooms, Computer Teaching rooms, Video Conferencing rooms and other nominated areas.

MATV outlets will be cabled back via an accessible riser duct with lockable door to roof mounted antennae.

All outlets for MATV distribution shall be terminated with PAL/'Belling Lee' style sockets; only those provided for direct connection of a receiver/decoder for Satellite, Cable or other commercial service may be terminated with 'F' type sockets.

All UTP and serial digital vision cable dedicated to audio-visual signal transport shall be white .

15.6.4

All connector types at terminations shall be clearly specified or indicated on. Alternative connectors are not acceptable to DS.

All serial digital vision cable shall be terminated with true 75 Ohms connectors that are specified to pe(e)13.34eD53 0 T 66.6 G

15.12 Registration of AV Assets

As soon as practical prior to the granting of Practical Completion of the Project, the AV Contractor shall provide to the Superintendent, a list of all AV equipment provided under the Contract including serial numbers, MAC address where appropriate, value and location by room number.

16 Hydraulic Services

The requirements of this Section are generally Mandatory

16.1 General Requirements

All key operated isolation valves to have the top of the spindle within 100-200mm from the top of the access lid (FSL). Where the top of the spindle is lower than 200mm from the top of the access lid then an approved hot dipped galvanised steel extension risers shall be bolted to valve spindle to comply with the 100-200mm clearance requirements.

If the existing isolation valves are found not to be functioning correctly when installing new works, the contractor shall agree with GU whether they shall be repaired or replaced with a new valve (at additional cost to contract). Butterfly valves are not to be used as a replacement.

16.1.9

Ground colours used in conjunction with safety colours shall be applied to each side of the safety colour.

The direction of the flow shall be indicated by an arrow adjacent each colour band.

‘Safetyman’ adhesive labels shall be used for identification and indication of the direction of flow of pipework.

1.17.16

All services which penetrate fire-resistant separating elements as indicated in the NCC BCA, AS4072.1 or any other relevant standard or regulation shall be included on a fire penetration plan and register.

The fire penetration plan and register shall indicate the actual location of the penetrations on the as constructed floor plans as well

The use of pump stations and rising mains of any sort are strongly discouraged and are subject to GU Engineering approval.

16.2.3

to e s Sew

16.2.10

Trade waste shall conform to relevant Australian Standards, Regulations, Codes and Local Authority requirements. shall be submitted to the local authority for approval.

Local Authorities guidelines and requirements:

- City of Gold Coast - Trade waste guidelines
- City of Brisbane - Urban Utilities - Guideline for hydraulic plans with trade waste drainage
- Logan City Council – Trade Waste Pre-treatment Requirements

All trade waste shall be submitted to the local authority for approval.

The Environmental Protection Regulation 2019 – Schedule 10 Prescribed water contaminants in conjunction with the Environmental Protection Act 1994 must be addressed to ensure the prescribed water contaminants are directed to the appropriate discharge e.g. water from air-conditioners to sewer/trade waste and not stormwater.

All buildings with trade waste shall have a trade waste register which shall be indicated on the hydraulic services drawings, included in the O&M Manual and shall also be made available as an excel spreadsheet for the building asset register.

Trade waste register shall include the following:

- Arrestor type e.g. Acid, Silt, Grease, Oily water, Cooling, Balance Tank
- Arrestor size in litres
- Fixture and quantity
- Peak Flow in Litres/Hour
- Total Peak Flow in Litres/Hour
- Storage Factor / Loading Multiplier
- Pump Out frequency

All pre-cast concrete grease or silt arrestors are to be protected by an internal acid resistant protective coating, installed during manufacture and prior to the delivery and installation of the arrestor.

r.7

16.3.6 Valley Gutters

Valley gutters shall be designed to AS/NZS 3500 with profiles and dimensions clearly indicated on the design drawings showing the effective width, depth and freeboard as per AS/NZS 3500.

16.3.7 Stormwater Discharge

The route, point of outlet and method of discharge is to be approved by CLF. Provide a means of dispersal with water energy reduction.

16.3.8

Inspection chambers shall be provided at major changes of direction and junctions external of the building.

Stainless Steel Asset identification tags are to be provided as per GU equipment label requirements – 38mm dia. x 1.6mm thick 316 stainless steel tag affixed with stainless mushroom head centre spike installed into concrete surround around gas tight cover.

Inspection chambers shall be installed in accordance with Local Authority requirements, QUDM, SEQ water standard drawings and AS3500.

All chambers over 1200mm in depth shall have hot dipped galvanised step irons or ladder coated with approved protective material to promote anti slip surfaces.

Gas tight chamber covers, and frames shall be manufactured in accordance with AS3996 and shall include cast iron covers and frames with removable plastic lifting hole plugs fitted. All covers must be compatible with '"EJ" lifters.

Roadways – Solid top cover with "stormwater" stamped into the cover a minimum of Class "D"

Landscape Areas - Solid top cover with "stormwater" stamped into the cover a minimum of Class "B"

Concrete Pathways and Turfed Areas – Infill top cover with "stormwater" stamped into the cover a minimum of Class "B"

All inspection chamber lids to have a minimum of a 150mm structural concrete surround around the lid and tied to inspection riser and inspection chamber roof slab prevent movement between the inspection lid, riser and adjacent finished surfaces (SEQCode Standard Drawing SEQ-SEW-1308-1'C' ALL MH CLASS "D" TRAFFICABLE OR BOLT-DOWN INSTALLATION DETAIL).

Top of chamber lids in landscaped areas (not turfed) shall be installed 100m above landscaped levels to the same gradients as the landscape.

Brass and stainless steel edged decorative covers are not permitted for use unless prior approval has been granted by GU Engineering.

Inspection chambers shall not be installed within buildings unless prior approval has been granted by GU Engineering.

Chambers in landscaped areas shall be identified by a "Dura-Post" Premium Steel green painted marker post with reflective coloured coded sticker and custom lettering to suit pit type, with dimension distance indicated under in metres along with direction arrow or approved equal.

16.3.9

All grated drains for the collection of surface run-off shall have the main bars running in the direction of flow, however grates located in pathways or paved areas must be suitable for the passage of wheelchairs. Heel guard protection to be provided for all public pedestrian traffic areas as per legislative requirements.

'Forge-weld' brand grates complete with matching metal frames should be used, not cast iron grates. Square stainless steel grated sumps are preferred in tiled areas.

Sizing of drains shall be to the Superintendent's discretion, QUDM, AS3500 and the current AS 1428.

Stainless Steel Asset identification tags are to be provided as per GU equipment label requirements – 38mm dia. x 1.6mm thick 316 stainless steel tag affixed with stainless mushroom head centre spike installed adjacent grated stormwater drains.

16.3.10

Where Gibault type jointing is required flange adapters and couplings shall be epoxy coated ductile iron bodied to BS EN 10242 Tw20218.96

16.5 Cold Water Service

Buildings shall be supplied through a two-

tested as required by this Section and the Code requirements and shall be leak tight before inspection of the particular work is requested. Tests shall be repeated to the satisfaction of the authorities having jurisdiction.

Pressurised pipe work shall be hydrostatic tested for 60 minutes at pressure of 1.5 times the maximum operating pressure of the pipe work. Gravity flow drainage lines shall be hydrostatically tested at maximum hydrostatic pressure for a minimum 60 minutes. Or other approved methods as required by the manufacturer or statutory and legislative requirements.

All defects shall be remedied immediately, and the tests reapplied to the satisfaction of the Superintendent and the Authorities.

At least 72 hours' notice shall be given prior to the carrying out of tests. Where construction vehicles or similar equipment is used on site, allowance shall be made for retesting pipelines under concrete slabs on ground immediately prior to placing membrane and reinforcing steel.

Inspections of all under slab pipework shall be carried out by the Local Authority, the Hydraulic Consultant and the Superintende2 (i)-0 undeendupultTj 0.007ouĺ€eo plab MC /P <</MCID 5 >>BDC -8.6193 -1.147 Td b MCj EMC /P <</M

- Dependant on the final finishes and the location the capped service will be either bought up through the floor so it is flush exposed or the finishes will be installed over. As an example, self-levelling compounds can be used as a skim coat over the bolted trap screw for areas where vinyl may be used.
- Agree all details with the GU Hydraulic and Fire Engineer.

Multiple services to b e removed

- Excavate at the required points to cap the drainage. This would be generally at the main branch line or in the instance below at a position determined by the relevant stakeholders so that the capped connection points can be utilised in the future.
- Provide tied dimensions from a minimum of two fixed structural points which must be in an intersecting arc to all capped services. This is the location at where the drain has been capped for all the service and must rise to ground level.
    - A depth must be indicated (from finished floor level), the pipework size and material for the points.
    - All existing demolished services must be noted on the as constructed drawings where services may remain installed underground. This helps future contractors when potholing in the future to ascertain whether the services are redundant or not.
- Service to be capped with a 316 stainless steel bolted trap screw.
- Dependant on the final finishes and the location the capped service will be either bought up through the floor so it is flush exposed or the finishes will be installed over. As an example, self-levelling compounds can be used as a skim coat over the bolted trap screw for areas where vinyl may be used.
- As both the trade waste drainage and the trade waste vent are being capped below the floor the bolted trap screws shall be engraved to indicate what the specialist services are e.g., trade waste drain or trade waste vent. This allows for future connections e.g., new food tenancy to be installed.
- All the existing drains within the area which are to be permanently made redundant are to be cut off below the surface of the finished concrete and are to be sealed with concrete which is keyed into the existing slab with some form of reinforcement.
- There is no requirement to fill or remove the entire underground existing drainage system.
- Agree all details with the GUU Hydraulic and Fire Engineer.

On completion of the project and during the commissioning of the facility, an air pressure differential test shall be carried out to confirm the design and compliance with physical containment requirements.

Provide an LCD screen adjacent to the entry door to indicate the room pressure achieved.

Coil UV systems – Provide off coil UV systems for all new AHU's. The system shall meet the requirements of AIRAH DA15 Manual Section 12.7.4 and to provide a minimum dose of UVC not less than 1225 µW/cm2 at the edge of the coil.

UVC System for Kitchen Hoods – All kitchen exhaust hoods shall be installed with a UVC system similar to the 'Capture-ray' technology manufactured by Halton. The UV lights shall be capable of easily maintenance and replacement. Alternative similar technology with equal and proven performance will be acceptable subject to the approval of the GU Mechanical Engineer.

Gold Coast campus – All external metal work such as outside air grilles, equipment supports, external mesh, filter frames, etc, shall be minimum 316 stainless steel.

Refurbished Buildings – Special requirements apply to all refurbished buildings in relation to the existing chilled water system. The scope of work for the project shall include the following steps;

- Provide a dilapidation report on the air conditioning system prior to starting on the project identifying any issues or potential problems for the new work
- Measure all existing chilled water flows in the building and provide a report
- Allow to rebalance all the chilled water units in the building back to either original design or the

Population Densities – In general population densities shall be based on the actual project, where this is not possible then the population densities can be taken to be approximately equal to those shown below:

General Office	10 m^2/person

- External insulation shall be provided around ductwork wherever there is a chance that condensation may form including in addition to all locations required by section J of the National Construction Code.

17.2.10 Plant & Equipment

Pumps – Pumps shall be Centrifugal

Air Handlin9 Tc 0.23.p

Provision for temporary power at the Main Switchboard will be generally preferred but the requirement for a temporary generator connection point on the MSSB shall be considered for special research installations where power interruption to carry out MSB maintenance cannot be tolerated. This will be by exception and agreed with Griffith Engineering at Design Development stage.

Each mechanical-electrical switchboard shall be metered at the Main Switchboard Refer to Section 17 Clause 17.8 for further details of meter installation.

All cables shall be run on cable trays, ladders, catenary wire etc and terminated in terminal strips. All cables entering switchboards shall enter the switchboards through a gland nut and be terminated on a terminal block, labelled as to its origin and numbered. All active, neutral, earth and control wiring shall be number ferruled both in the switchboard and at field terminations corresponding to circuit breaker numbers. Wrap around tape numbering systems are not acceptable to the Superintendent. Multi-joining of cables prior to termination on bars is not acceptable. Neutral and earth bars shall have the same number of terminations as circuit breaker positions and shall include two grub screws per terminal. All cabling shall comply with the requirements of Section 19 Electrical Services.

The MSSB shall include 'Auto/Off/Manual' switches for each piece of equipment served except for VAV boxes which will have a heater 'Auto/Off switch (refer to GU Standard Drawing No. GSD–600, as noted in section 31 of this document gives link to internet site). For all VAV heater banks, an HPT fault indicator light for each VAV unit shall also be provided on the MSSB fascia.

EC Motors shall also have a local speed adjuster which shall be mounted on the facia of the MSSB adjacent to the motor AOM switch. When the AOM switch is in the M position, the BMS speed control signal shall be switched out and the local speed adjuster shall become operational.

Approved electrical and control drawings shall be prepared and supplied with the switchboard by the Date of Practical Completion.

Provide a surface mounted LED batten in each switchboard cupboard greater than $2m^2$ in face area.

All mechanical switchboards shall have a lamp test facility incorporated into the control system via relays and not diodes.

All mechanical boards shall be adequately vented to remove heat and locked via an 'L&F 92268' key.

Mechanical services switchboards shall be supplied directly from the building main switchboard with dedicated submains cabling to each individual switchboard. No mechanical services should be supplied from general light and power switchboards.
All Electrical & Mechanical services inside the ceiling void which will generate heat such as recessed light fittings, transformers etc. shall not be covered by any thermal insulation or the like which will impede the heat rejection. For small transformers, it is suggested that they be hung on independent support wires.

17.2.12 Identification of Pipework & Ductwork

All pipes and ductwork shall be identified in accordance with AS 1345 – Identification of the contents of Piping, Conduits and Ducts, and AS 1318 – SAA industrial Safety Colour Code and AS 2700 – Colour Standards for General Purposes. Extra labelling shall be provided if requested by the Superintendent for clear id o (e)0.cl mal .7 (b)13.4 .3

water supply, size of plant rooms, provision and/or size of service

The mechanical engineering consultant shall consult with GU Engineering Services and the approved specialist BMS provider to develop a functional brief for the air conditioning control strategy for all areas of a new building or a major refurbishment before design documentation is commenced. The functional brief shall identify the space, space usage, specific requirements and any other considerations that may be considered necessary to achieve the desired control strategy.

The main BMS network controllers shall connect to the main campus BMS central server via the Griffith

6he]T0 Tw 22.013 0 16.893

17.3.2 Occupancy Control

Systems shall be occupied using one or a number of the following methods. Spaces can have local Ahrs/run request push buttons or motion sensors depending upon the space type, but not both.

- Central Time Schedules (complete with holiday Scheduling), Non-Centralised time schedules are to be avoided when possible.
- Room Booking System
- Local Ahrs/run request push button complete with run neon indicator (where the room has a dedicated FCU located within the room, a neon indicator is not required)
- Graphics virtual run request (tick box).
- Dehumidification run request
- Motion Sensors

Typical Occupancy for space types:

- General office spaces with common AC plant
  - Central Time Schedules with local Ahrs push button
- Individual office spaces with dedicated AC plant
  - Push button enable with Central Time Schedule interrupt
- HDR spaces
  - Push button enable with Central Time Schedule interrupt
- Laboratory (Science)
  - Central Time Schedule (24/7) with relaxed temperature setpoint mode
- Meeting Rooms
  - Room Booking System with local Ahrs push button
- Seminar/Tutorial/Classrooms/Computer Labs
  - Room Booking System with graphics virtual run request (tick box) & motion interlock
- Lecture Theatres
  - Room Booking System with

station and the unit shall then be controlled to the most efficient mode. Economy cycles will only be required as per NCC Section J.

Carbon dioxide control – a lifecycle cost analysis shall be provided by the consultant to confirm benefits of any proposed CO_2 control. Provision for access for sensor calibration shall be specified on the drawings.

17.3.7 [illegible]

All Pre-Conditioners shall control to a supply air moisture content of 10.0 g/kg for typical spaces and 8.5 g/kg for special lab spaces. The moisture content shall be calculated from supply air temperature and humidity sensors, which shall be separate devices.

[illegible] Control - Lighting Control

External Lights
External lights are to be controlled via the campus's central control signals. One for building external lights and one for street/carpark lighting.

Backup software shall be in place at the main network controller level. The software will record the previous days off time between the hours of 4 am and 8 am & on time between the hours of 4 pm and 8 pm (this is to avoid event times being recorded during daytime storms). The lights will be enabled when either the previous day on time has occurred or the campus signal is on. The lights will only turn off when both the previous day off time has occurred and the campus signal is off.

All Libf (.)T.147 TDw/P <</ . -1.MCID 15 >>BDC /TT1 1 Tf (c)-2.7 1Q EMC BT MCID 14 >>13.3 (12.6 (gnal)12.7 (s)-2.7 (.)2

Access panels for maintenance shall be easily accessible. Where multiple cupboards are installed side by side, ensure any access panels in sides of cupboards are not obstructed.

17.4.3 Fume Cupboard Construction

Inner Chamber – The inner chamber shall be a single piece moulded design from chemical resistant GRP with large radiused corners. The roof shall be aerodynamically shaped evenly on three sides towards a flanged rectangle outlet at the rear of the chamber which shall not be less than 45% of the width of the inner chamber and containing no exposed fixing bolts. A flat non-aerodynamic type roof will not be acceptable. The inner chamber shall have a smooth finish for ease of maintenance and shall accept any runback from the exhaust.

Sash – Access to the fume cupboard shall be via a single 6mm thick safety glass door panel stamped by the manufacturer together with the SAS approval stamp. The door shall slide vertically in special PVC extrusions. The door panel shall be carefully balanced to ensure even and easy operation using stainless steel cables and low friction pulleys. Closure cushions shall be installed at the bottom of the door tracks to allow a 50mm minimum opening. Sash shall incorporate an automatic return to minimum position after 15 minutes (adjustable), function.

Front Fascia – The aerodynamically shaped fascia and door assembly having a full length aerofoil section shall be incorporated and constructed to ensure a smooth even airflow pattern entering the fume cupboard.

Rear Baffle – Moulded baffles are required at the rear of the cupboard and shall be designed to provide a laminar airflow at all levels and across the width of the cupboard. The baffles shall be readily removable for maintenance. The baffles shall be specifically designed, contain no exposed bolts and allow the whole chamber to be effectively scavenged.

with volt free contacts for connection of the BMS to monitor ‘Common Fault’ and ‘Low Pressure’. Provide HLI interface to BMS to monitor the system pressure variation over time.
The quality of the air shall be determined by the User and shall be classified to ISO8573 in terms of particulate, water and oil. Provide ISO8573 Class 0 oil free air for Laboratories as a minimum.

The compressor shall be effectively silenced.

Pipework shall be type ‘B’ copper with 15% silver soldered joints used for compressed air. All valves shall be ball valves.

S7 (3-2 b2)3anda.3 (r)d.7 (s)-2. anlic7-2a7(a 4-0.6 pl)-01(a)13.rllsnt3-2.7 (l)-0.3 (l)-0.cono6-0o.6 plssesf a s val vss a 4D5nd c

17.8 Depiction of Airflows on Mechanical Drawings for Consultants & Contractors

18 Fire Services

The requirements of this Section are Mandatory.

18.1 o

- Gold Coast, South Bank & Logan – Ampac Fire Finder Plus
- Nathan & Mt Gravatt – Notifier 3030

The panel manufacturer shall provide to CLF at no additional cost all maintenance tools and software for the servicing and upgrading of the panels.

All integrated evacuation systems shall be factory fitted.

The Building FDCIE shall be *Non Latching.*

Alterations or additions to existing fire panels shall only be carried out by the GU Incumbent Fire Equipment Maintenance Contractor. Work by any other contractor is not permitted. A full impact study of the existing system shall be conducted for any alterations or additions and must be approved by the Superintendent.

Installation cabling from any Building FDCIE to the Site Master Panel FDCIE and Site MIMIC Panel(s) shall be connected by the GU Incumbent Fire Equipment Maintenanl on13.ere(M)-16 (I)2.3 (m)-3 (ben)13.3 (t)2 ( )]TJ -0.002 Tw ID

When refurbishing spaces, do not re-use speakers which do not comply with standards current at the time of the refurbishment. If speakers are re-used, verify that sound levels of the final installation will comply with

18.9.3

Hydrants including signage and block plans shall be provided in accordance AS 2419.1.

Block plan signage to include the following additional information:

- NCC BCA Building classifications
- Relevant Australian Standard including version date
- National Construction Code version including version date
- Most disadvantaged hydrant/s location/description
- Dangerous Goods locations and main switch boards
- Design frictional loss through system in KPA

Fire block plans templates shall be provided by GU on request. All pen assignments, colours, layers and information shall match GU and QFES requirements, block plans shall be submitted a minimum of 2 weeks prior to practical completion and QFES inspection to allow for any necessary changes and updates.

Unless otherwise specified, hydrant systems shall be a' wet pipe' system.

System designs, hydraulic calculations and variations shall be submitted and agreed to with CLF prior to installation.

Hydrant booster installations where required shall meet the requirements of AS 2419.1/2/3.

The location, colour and design of fire booster installations shall be approved by the Building Surveyor and the QFES prior to design finalisation.

Inground spring hydrants are not permitted on s-0.7 (t)2 TMC /Ptc0fied, hymSd hSitldd Q06.7 (al)12.7 7 (t)((ha)13.4 (s)-2.7

alhydretsr (i)12.6 (n)13.3 (s)-2.6 (t)2 (al)12.6 (l)-2.6 (edf)15.3 (ha)13.4 (s)-2.7(

3 -0.001 Tw 5.320.916Td [(D)-© -0.ET q 9.95949 2 841.92 re W n /

pods, can be controlled by a timed weather proof push button located on the luminaire support post provided